

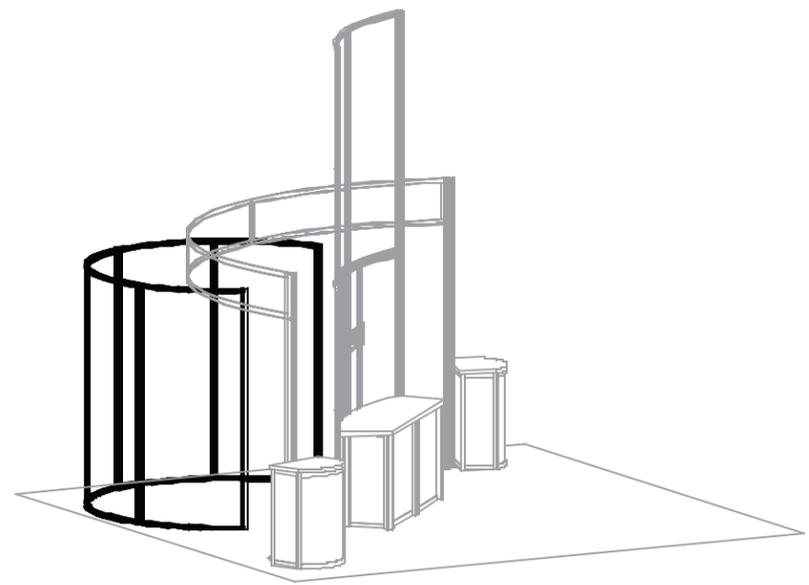


PERSPECTIVE

CURVED BACK WALL PARTS

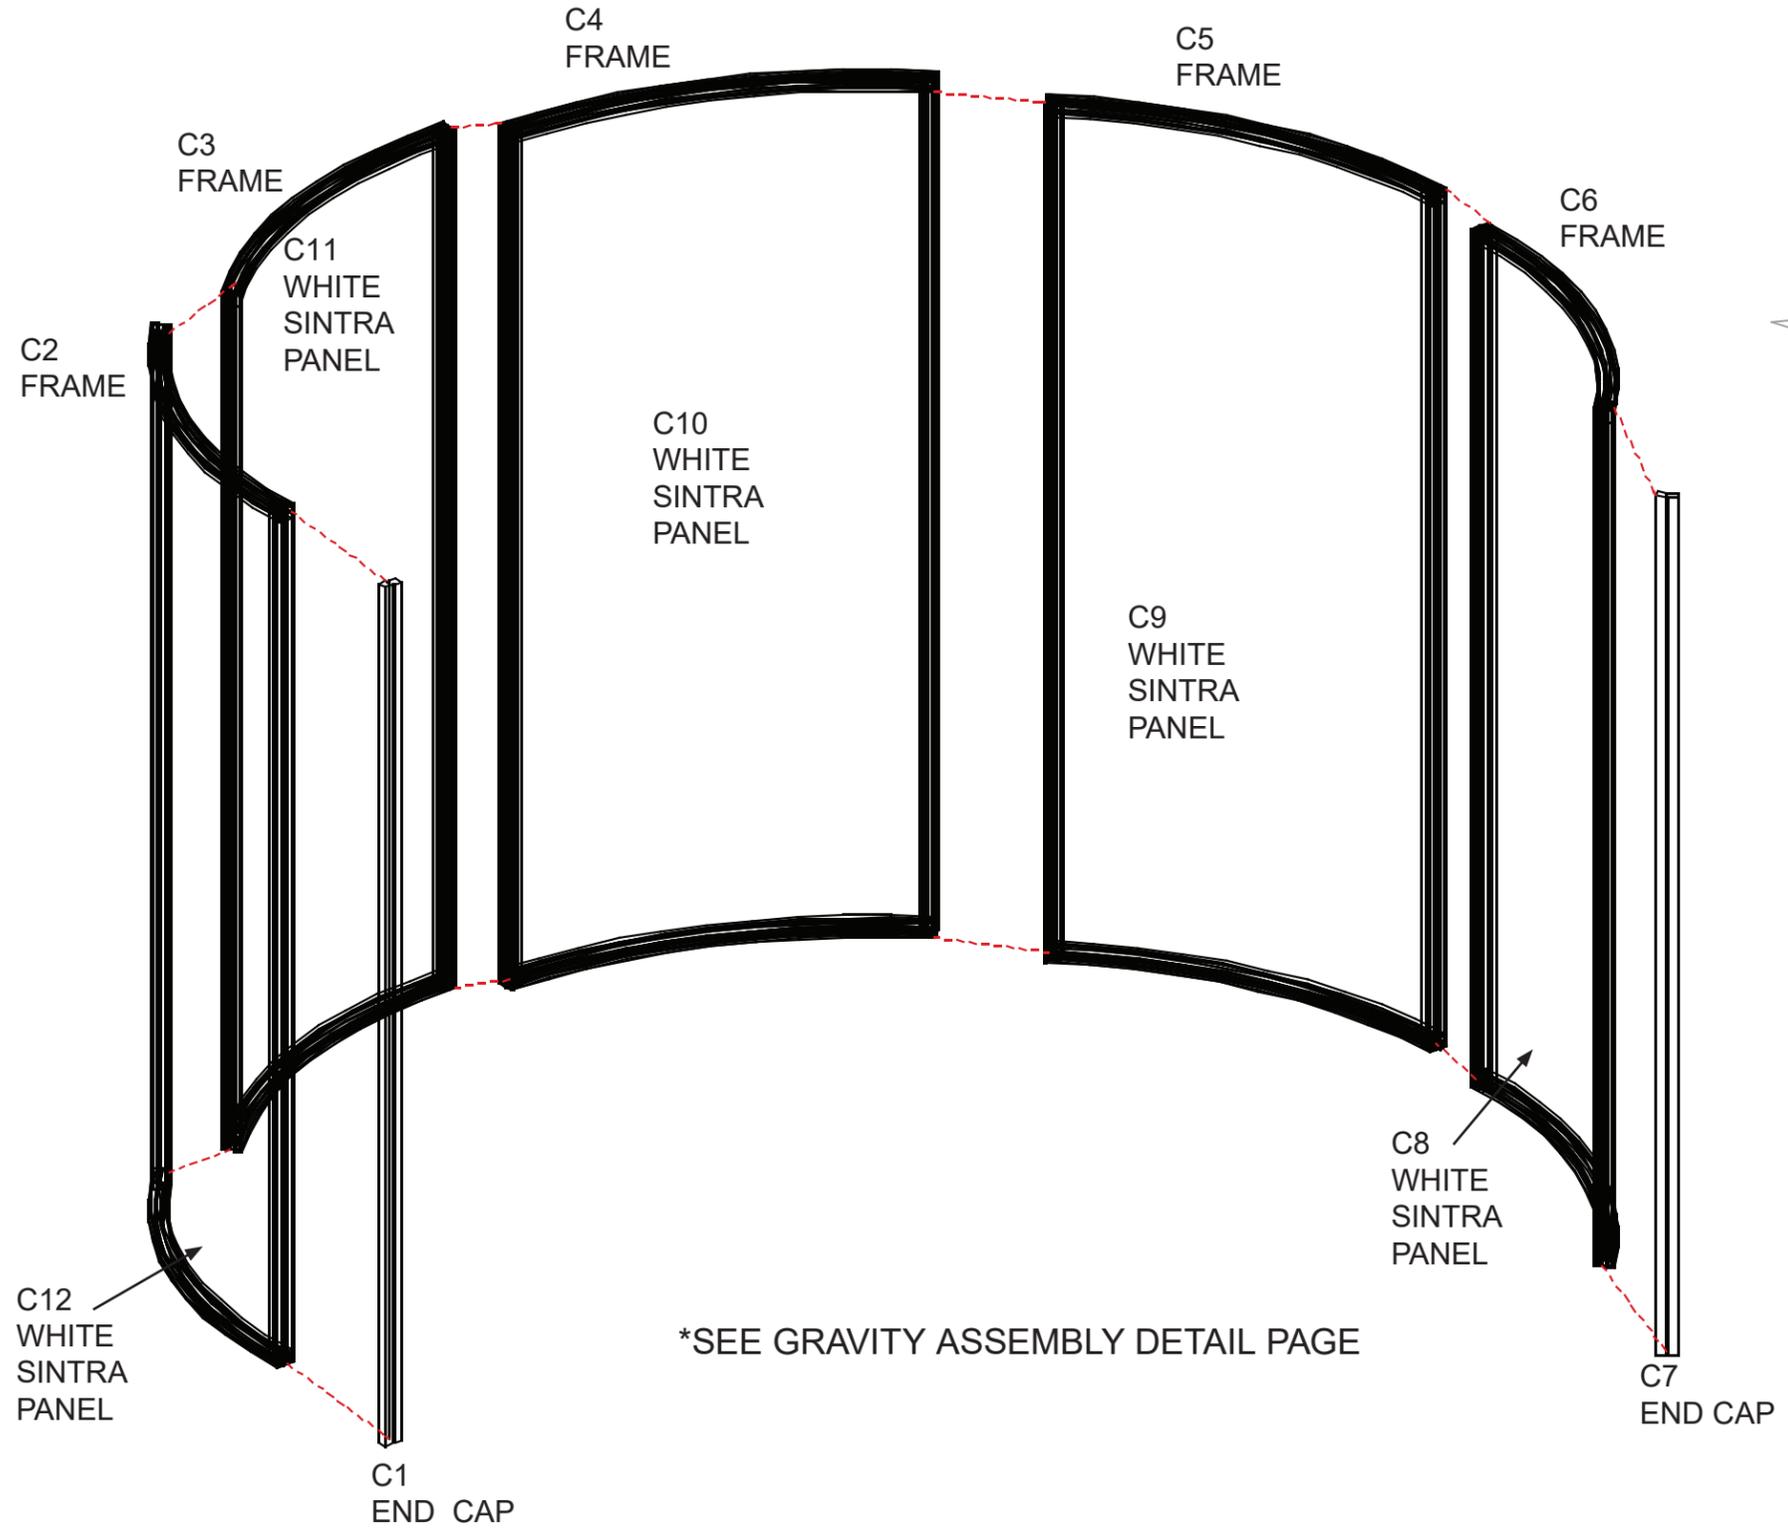


RE-1221 COUNTER

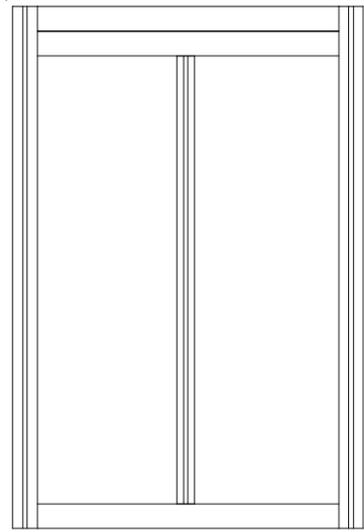



RE 1221 Back
Packed Assembled

lower horizontal is
raised .25" to fit over
base plate on
header support

RE 1221 sides
Attach sides with
infill
to front and back

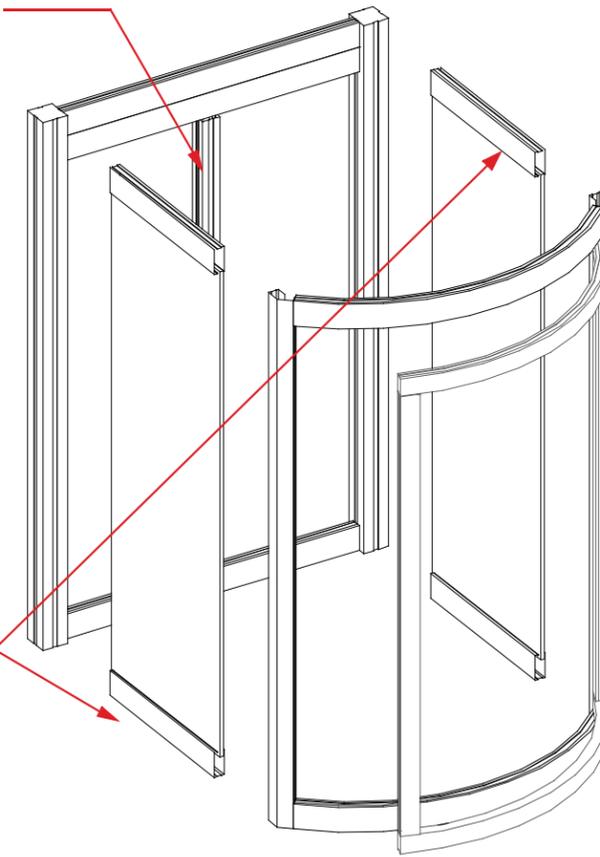


RE 1221
Front w/door
Packed Assembled

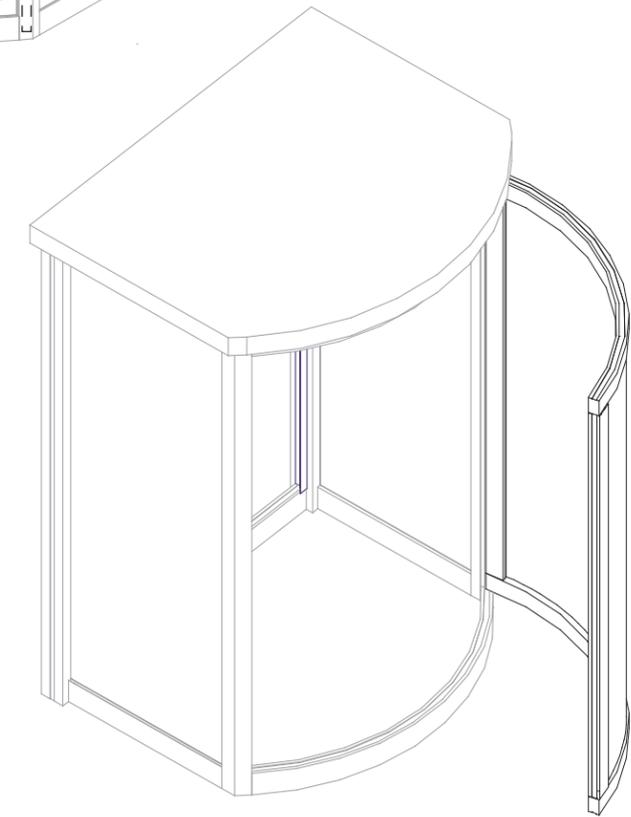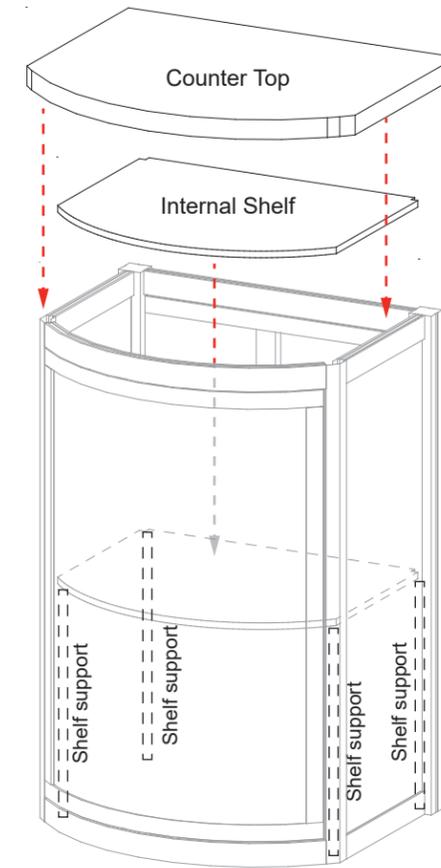


Curved door
on front

HEADER STRUCTURE WITH RE-1221 COUNTER



*SEE GENERAL INSTRUCTIONS-EXTRUSIONS

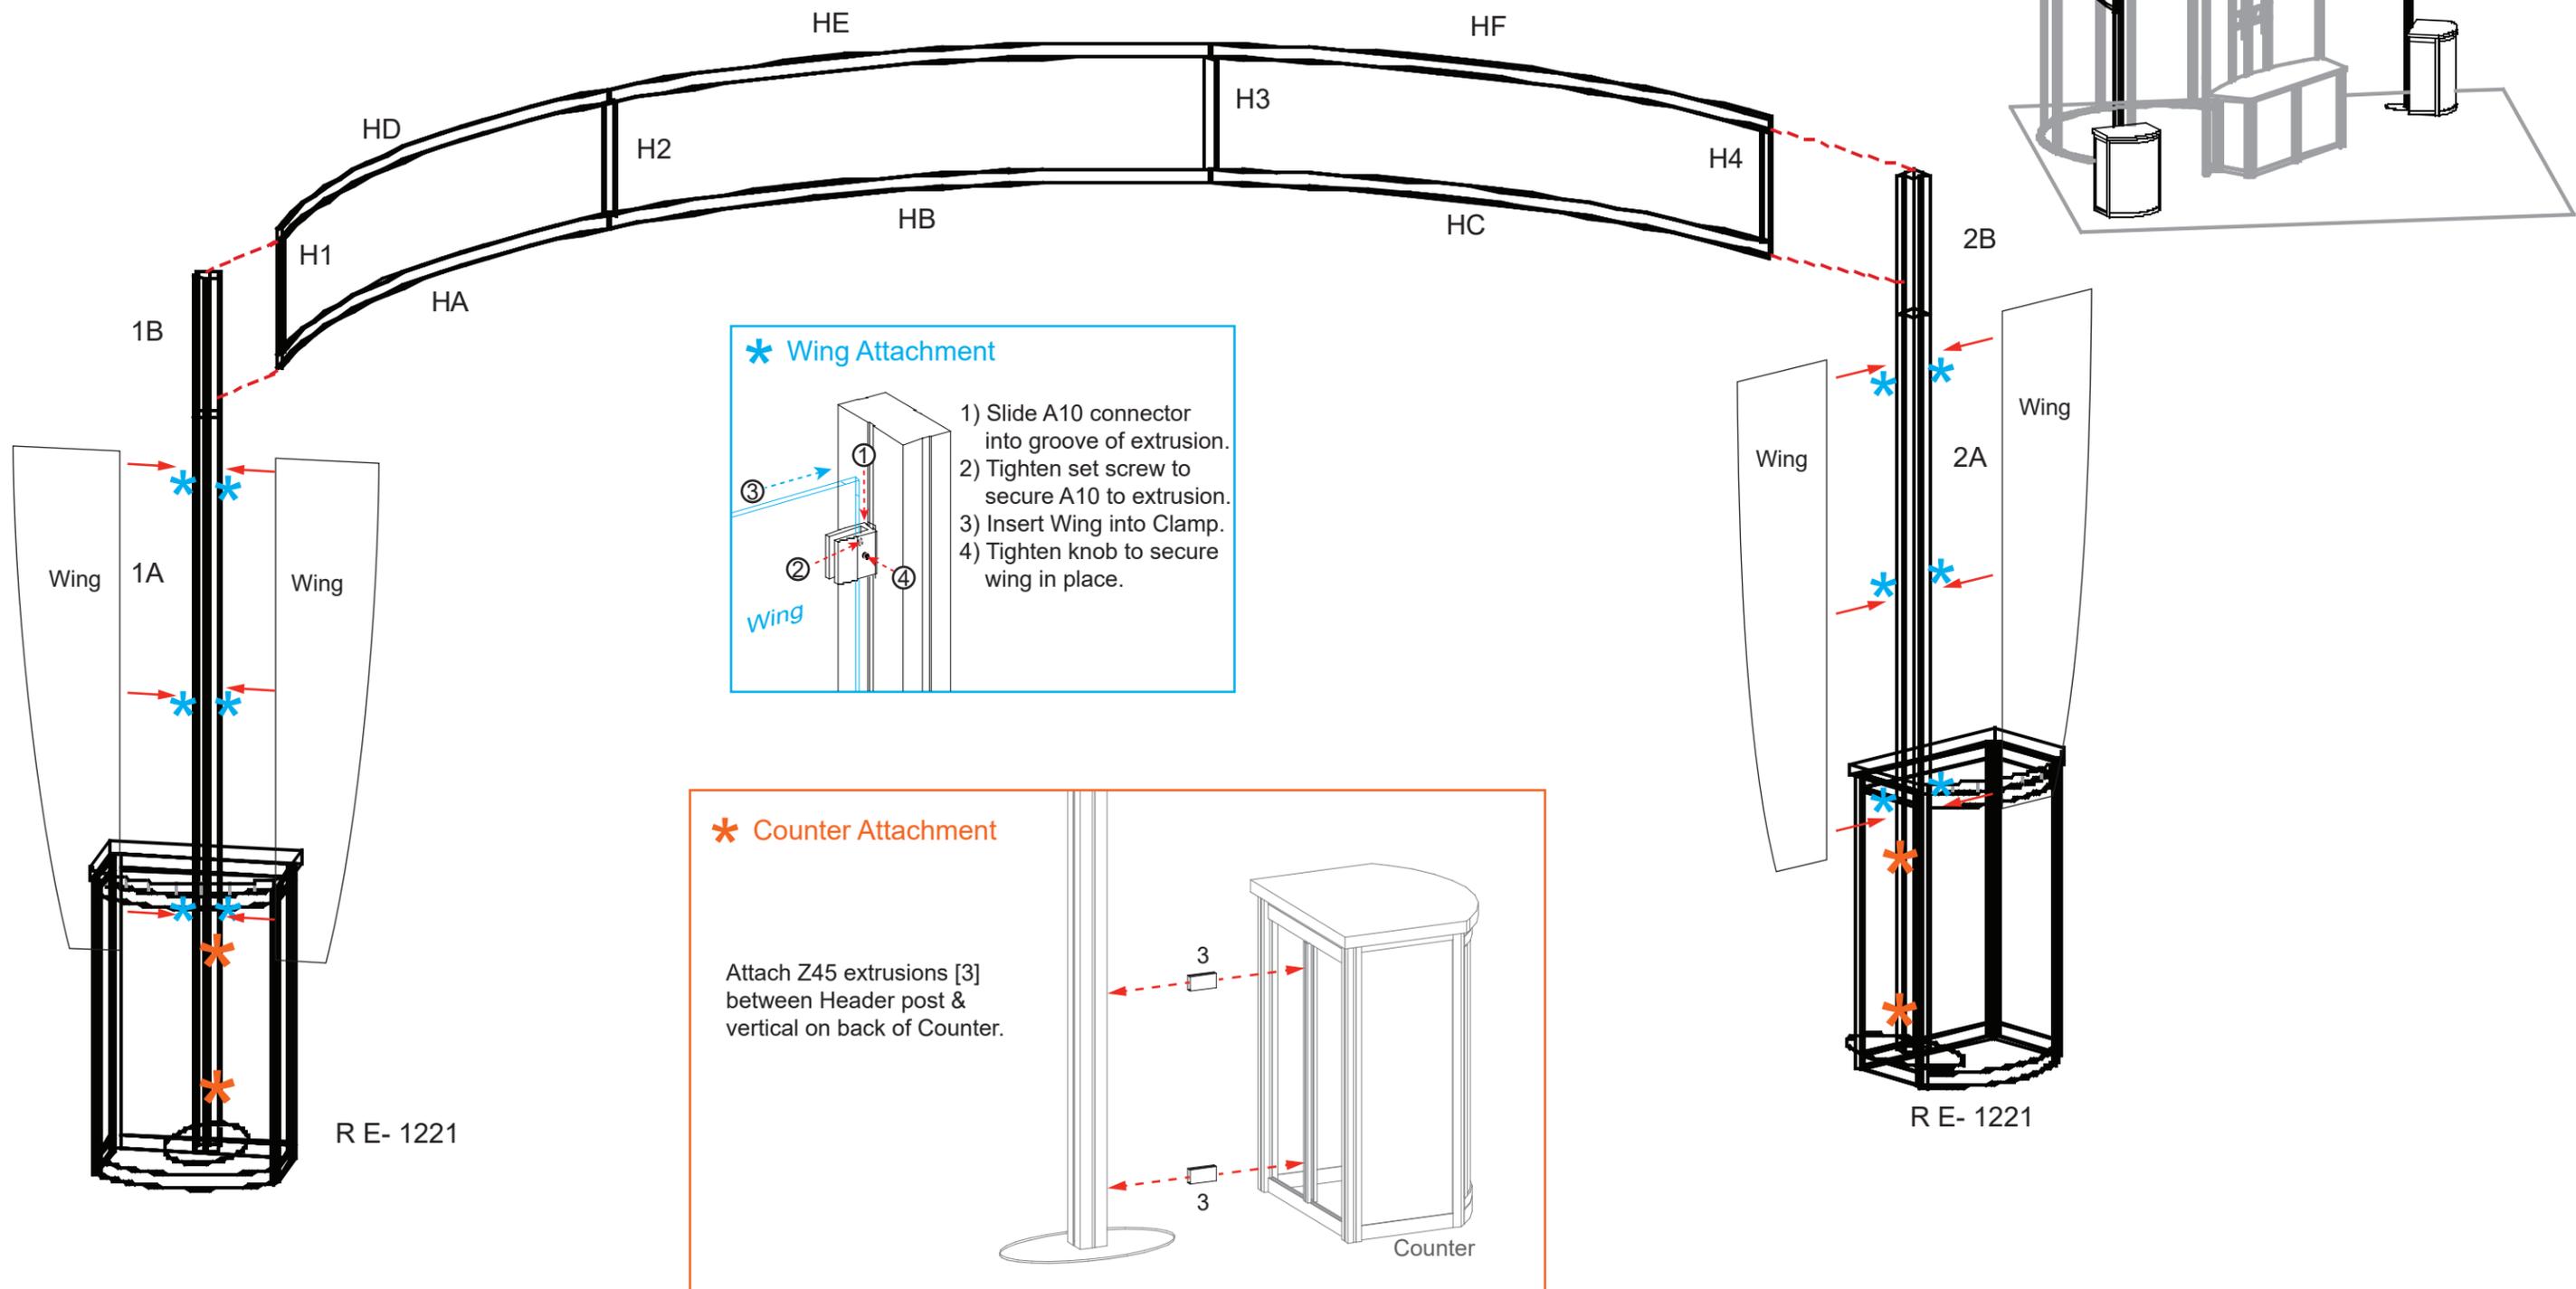

MONITOR WALL WITH COUNTER

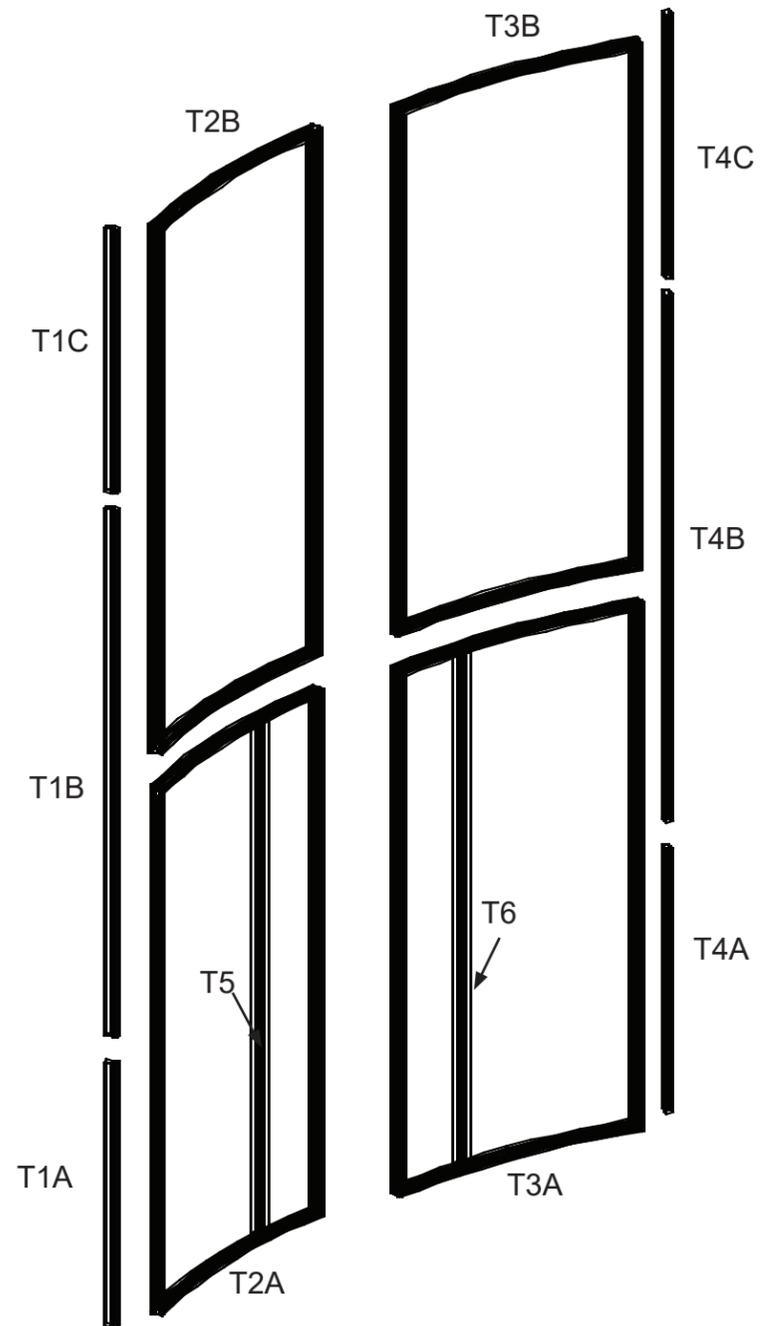

*SEE GRAVITY ASSEMBLY DETAIL PAGE

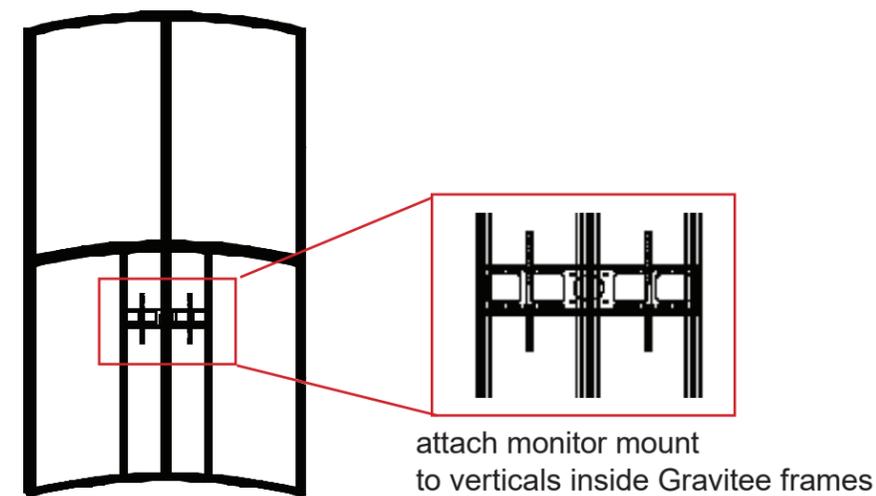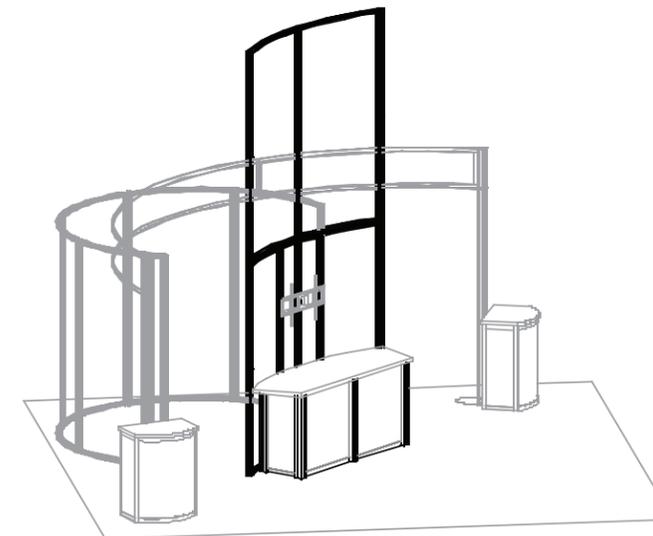

*** Monitor Mount Attachment**

Slide connector on back of standoff barrels into grooves of S40 verticals; turn barrel clockwise to tighten in place.

Standoff Barrel Attachment

Stand-Off Barrels

Monitor Mount

Bolts



SEG Graphic

S40

Attach Monitor Mount to standoff barrels using bolts.

Note: Monitor mount installs over SEG graphic.



RE-1207 COUNTER ASSEMBLY (Attached to Monitor Wall)

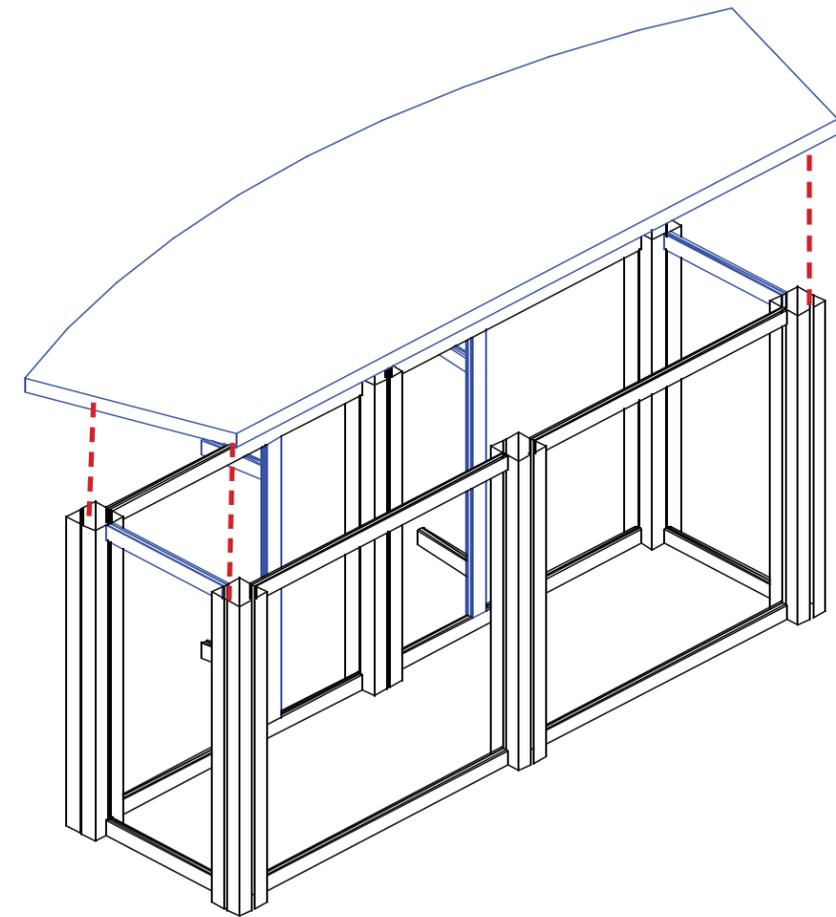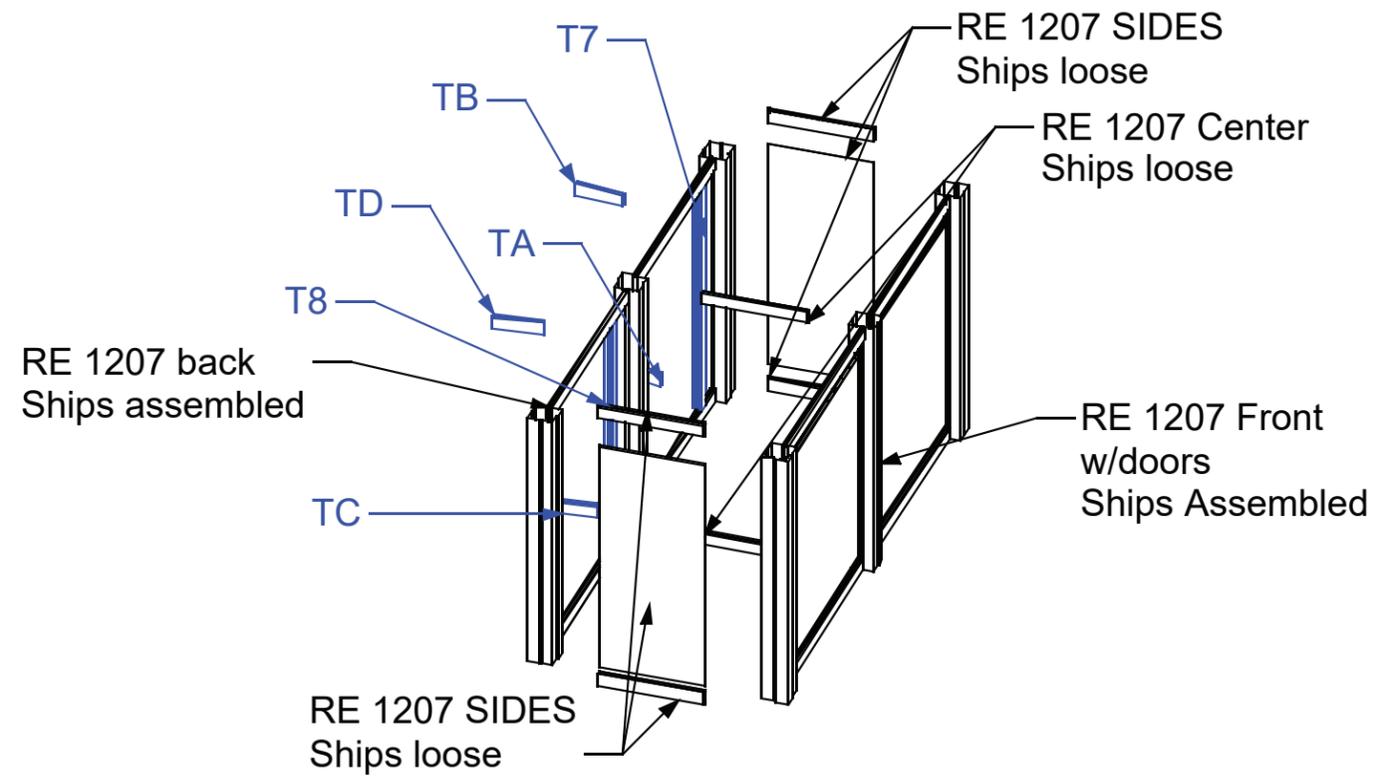


COUNTER TO MONITOR WALL CONNECTION

Qty.	Description
1	46.821"w x 95"h curved Gravitee Panel
1	46.821"w x 95"h curved Gravitee Panel
2	91.904"h S44 Vertical Extrusion
1	Counter Top


- Steps:
- 1) Attach S44 verticals to Gravitee Panels as shown.
 - 2) Connect Gravitee Panels together. Refer to the Gravitee Assembly general information page.
 - 3) Apply graphic to front of Gravitee panels.
 - 4) Connect Z45 horizontals of cabinet assembly to S44 verticals in Gravitee panels.
 - 5) Attach Counter Top to counter assembly. See Counter Top Attachment detail.

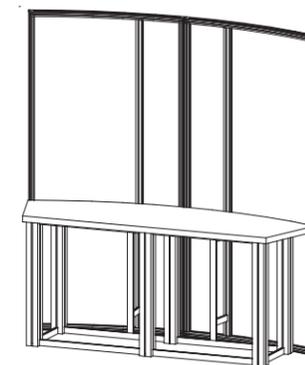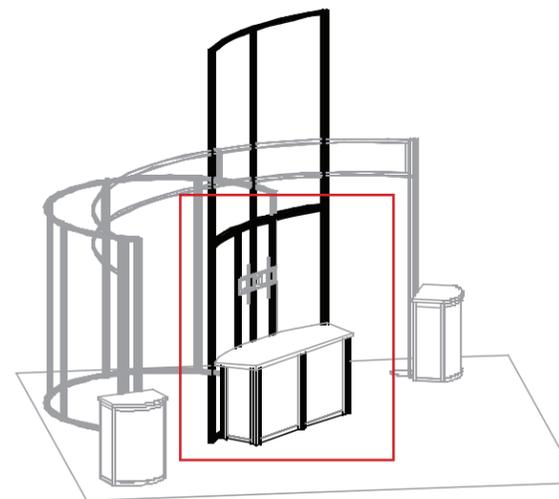



Completed Assembly

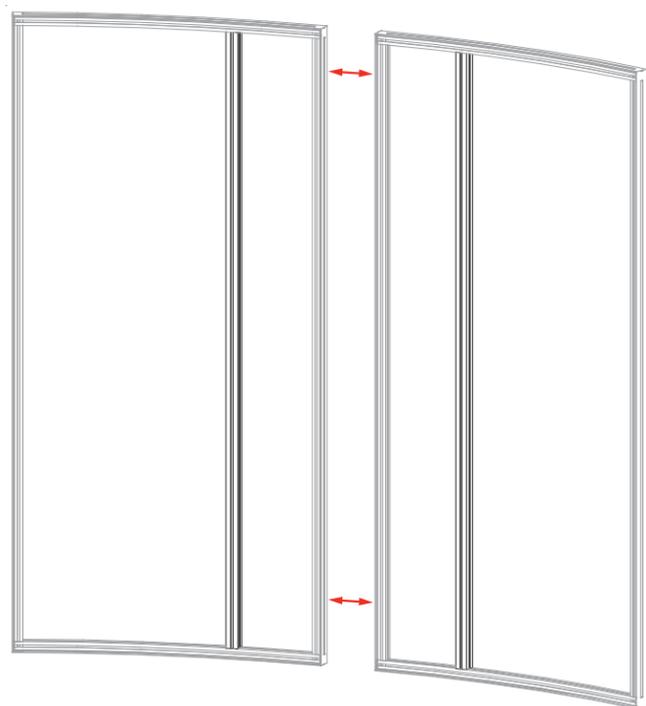


FRONT VIEW

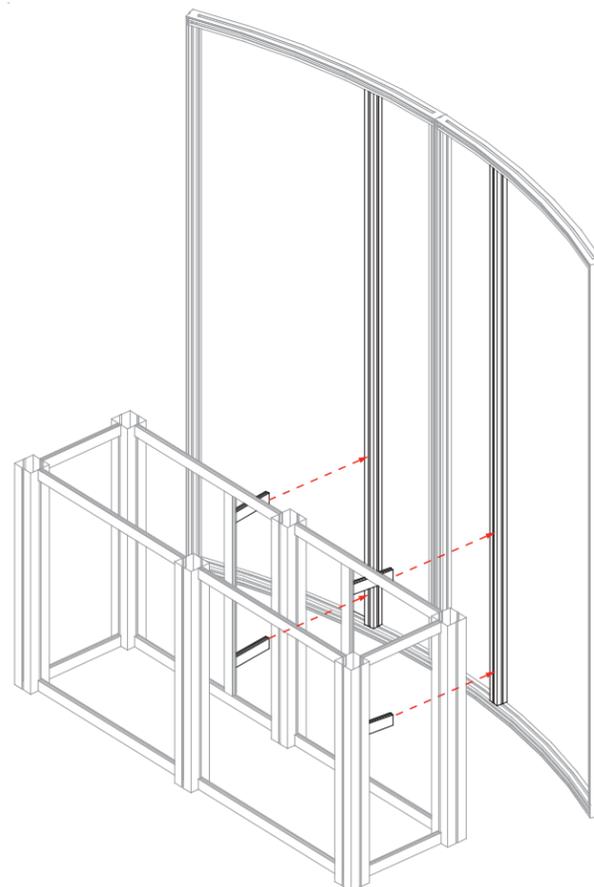



*SEE RE-1207 INSTRUCTIONS FOR COUNTER ASSEMBLY

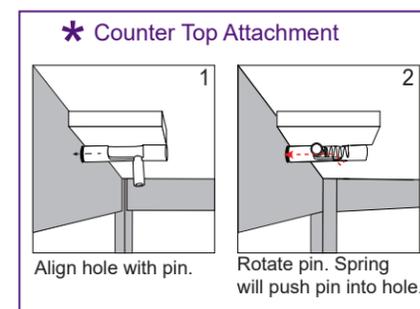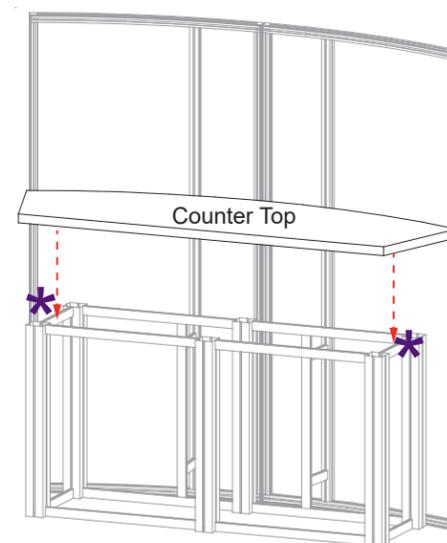

RE-1250 RECEPTION COUNTER

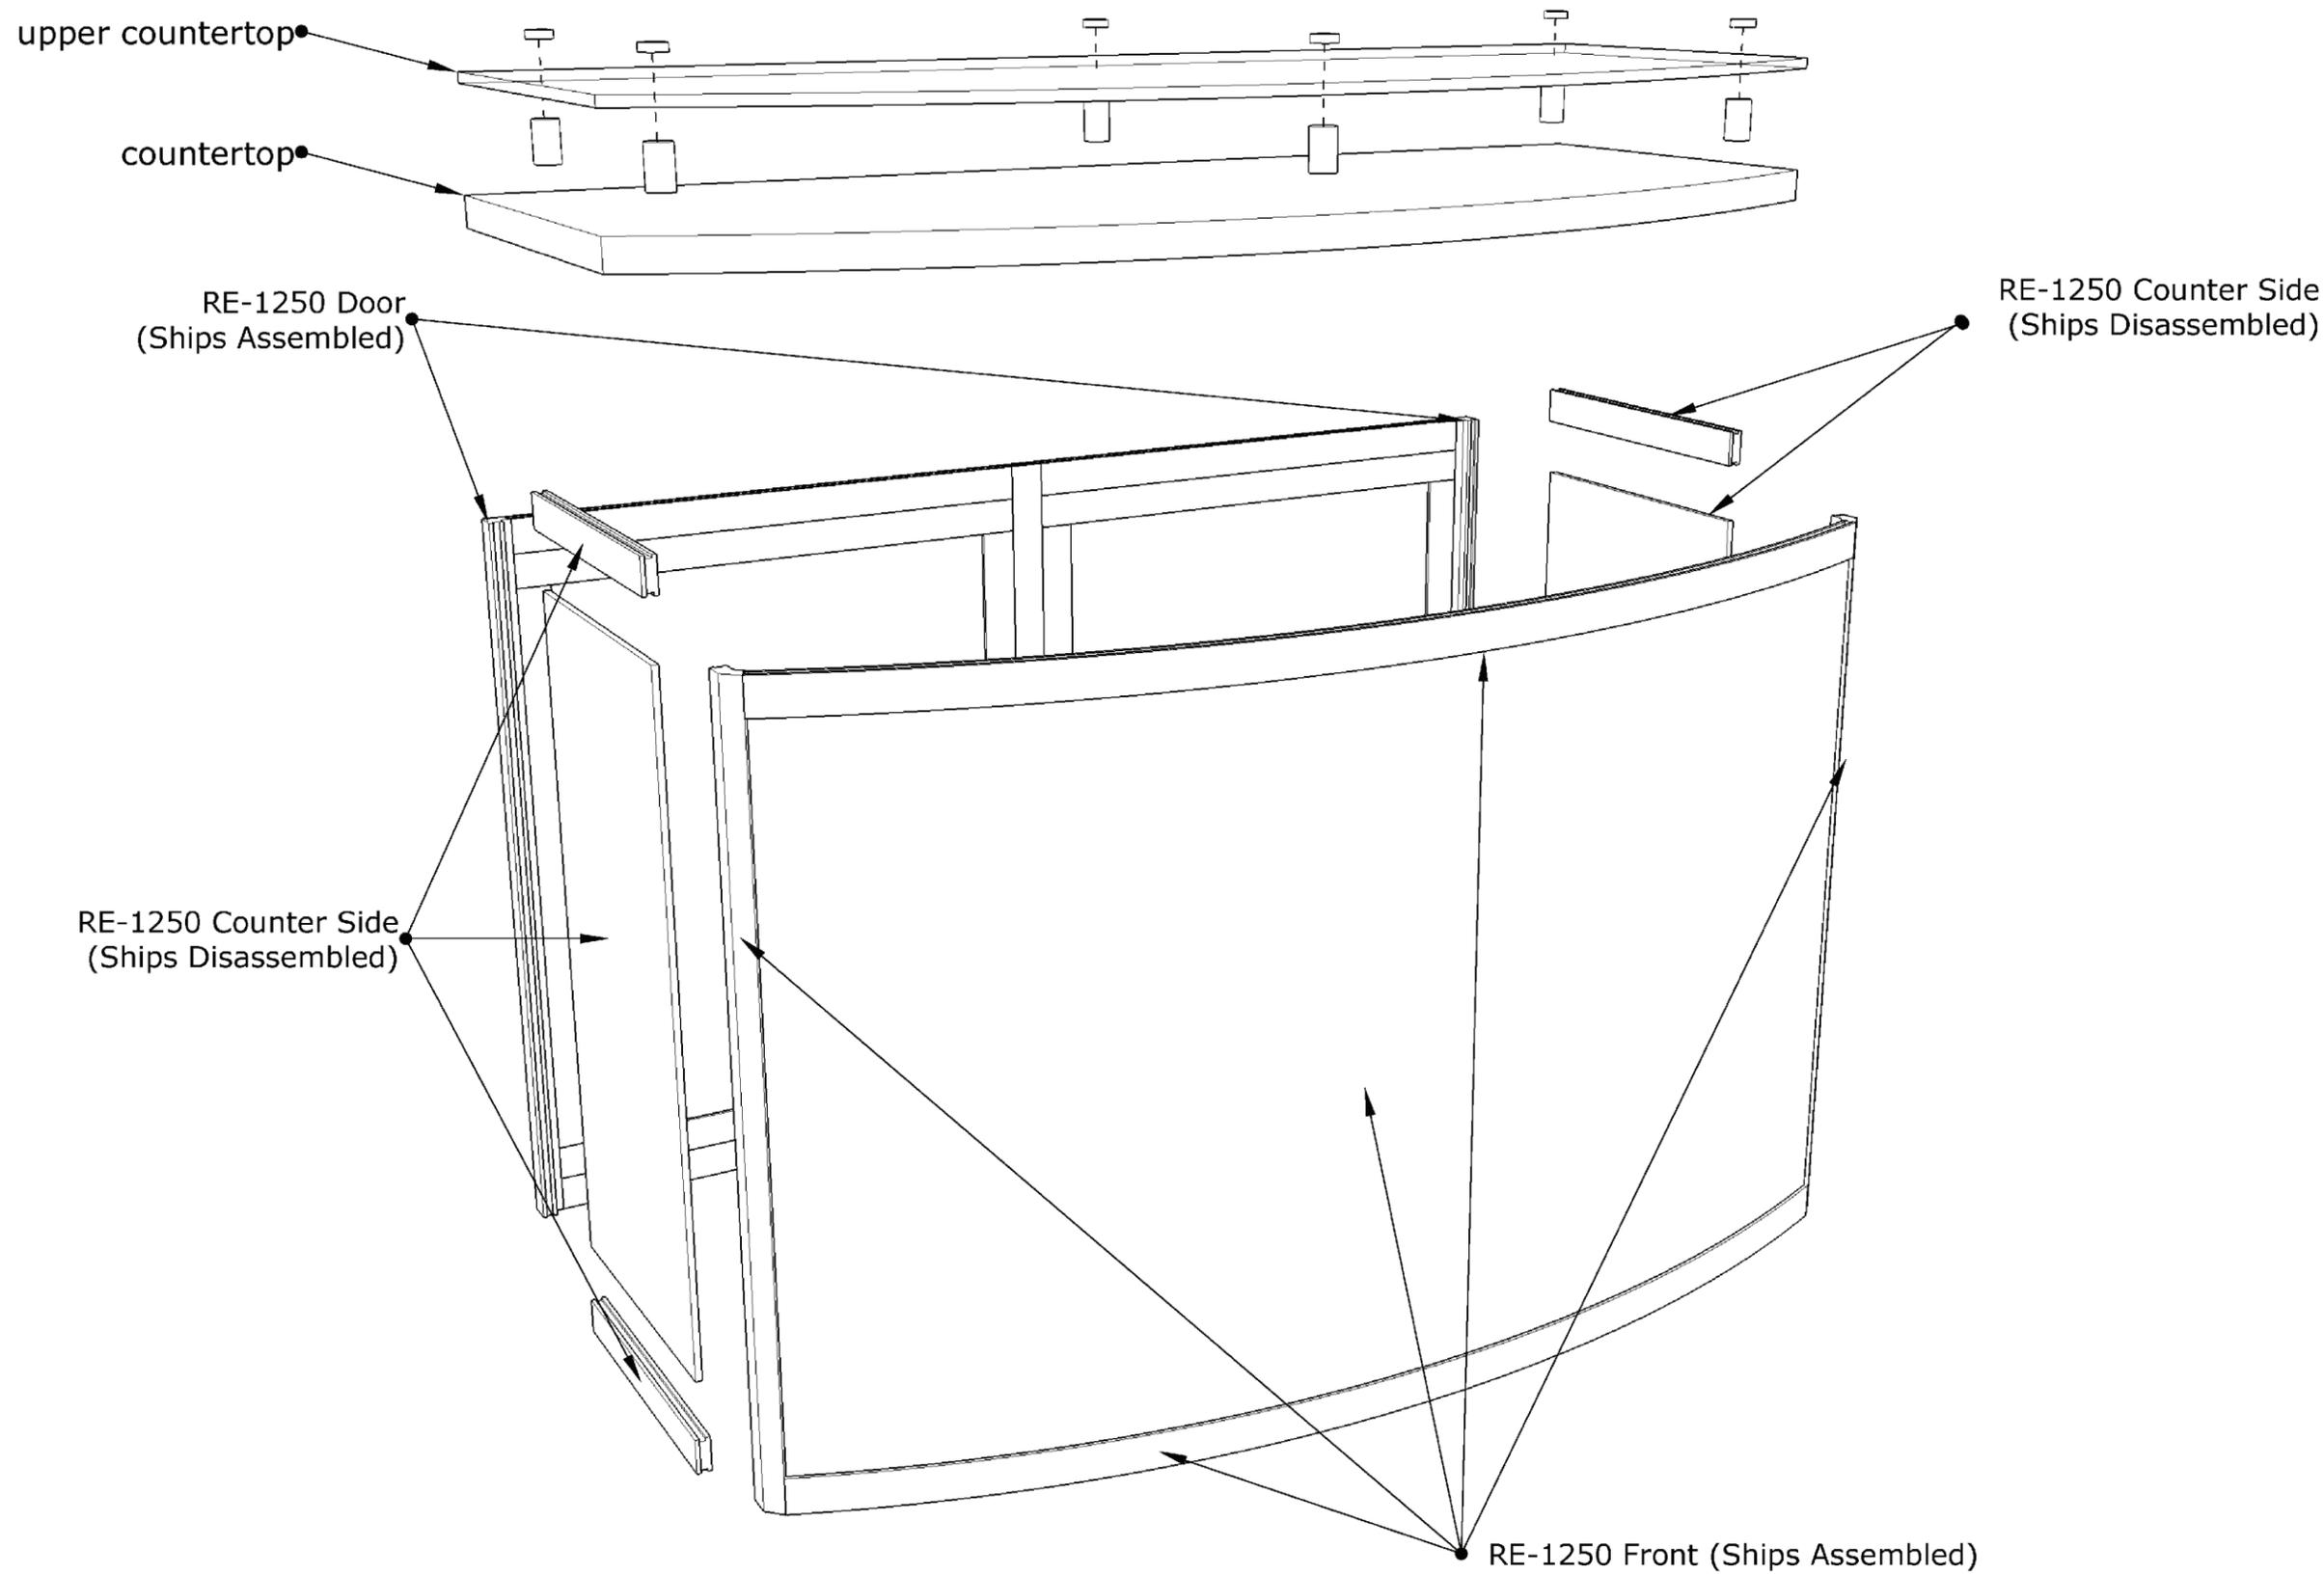


Graphics Template
20x20 Island
Main Tower

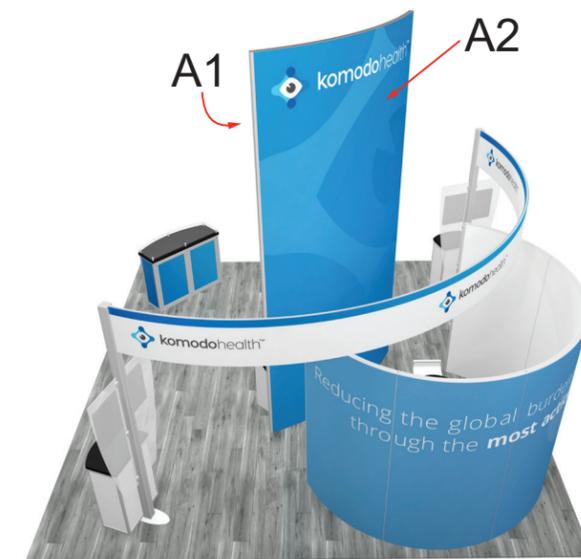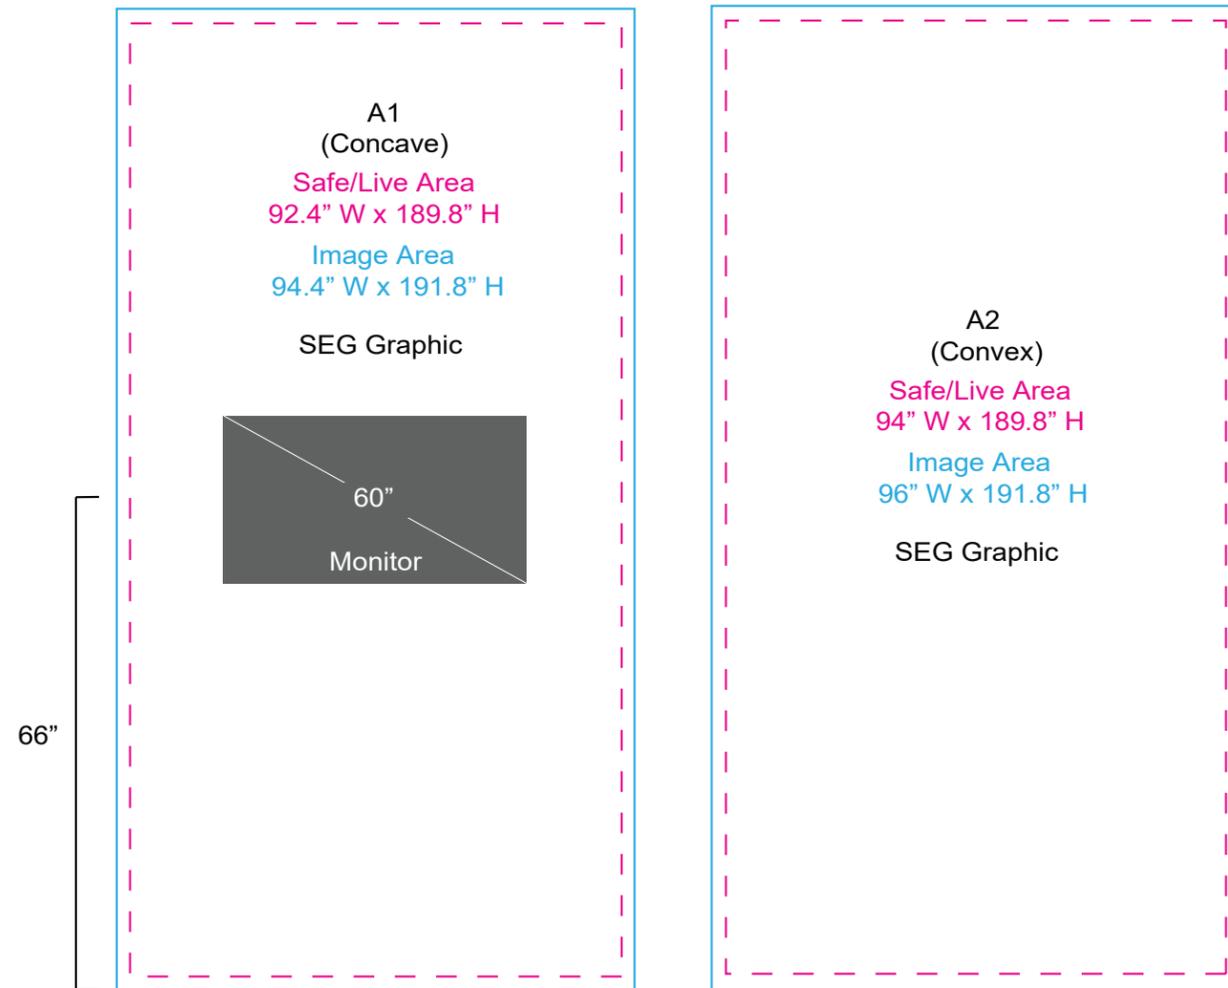


Graphics Template
20x20 Island
Meeting Area Wall

<p>B1</p> <p>Image/Live Area 46.9" W x 94.8" H</p> <p>Sintra Graphic</p>	<p>B2</p> <p>Image/Live Area 46.9" W x 94.8" H</p> <p>Sintra Graphic</p>	<p>B3</p> <p>Image/Live Area 46.9" W x 94.8" H</p> <p>Sintra Graphic</p>	<p>B4</p> <p>Image/Live Area 46.9" W x 94.8" H</p> <p>Sintra Graphic</p>	<p>B5</p> <p>Image/Live Area 46.9" W x 94.8" H</p> <p>Sintra Graphic</p>
--	--	--	--	--

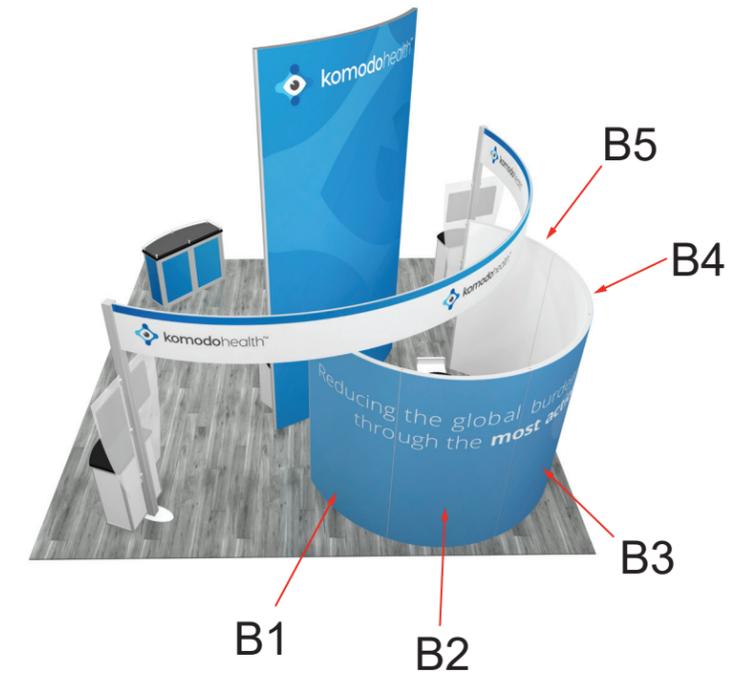


Graphics Template
Curved Header

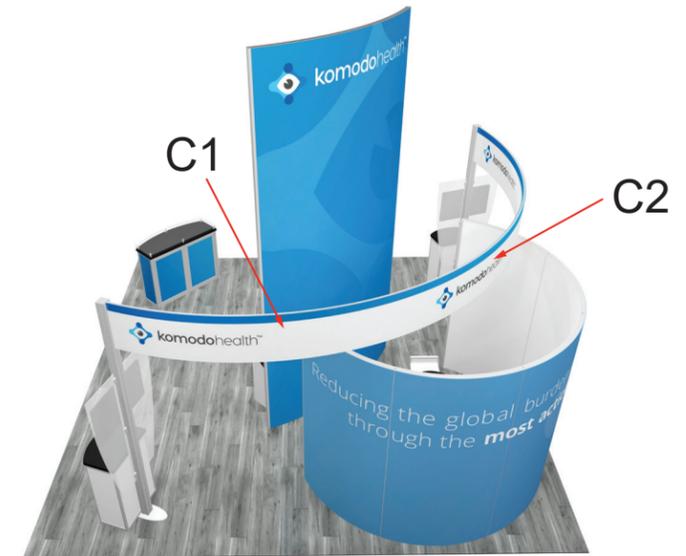


<p>C1A CONCAVE INTERIOR</p> <p>Panel # 1 -95.448" W x 18" H</p>	<p>C1B</p> <p>Image/Live Area 286.344" W x 18" H</p> <p>Panel # 2 -95.448" W x 18" H</p>	<p>C1C</p> <p>Panel # 3 - 95.448" W x 18" H</p>
--	---	--

<p>C2A CONCAVE EXTERIOR</p> <p>Panel # 4 -96" W x 18" H</p>	<p>C2B</p> <p>Image/Live Area 288" W x 18" H</p> <p>Panel # 5- 96" W x 18" H</p>	<p>C2C</p> <p>Panel # 6 -x96" W x 18" H</p>
--	---	--

Graphics Template
20x20 Island
RE-1221 Counters

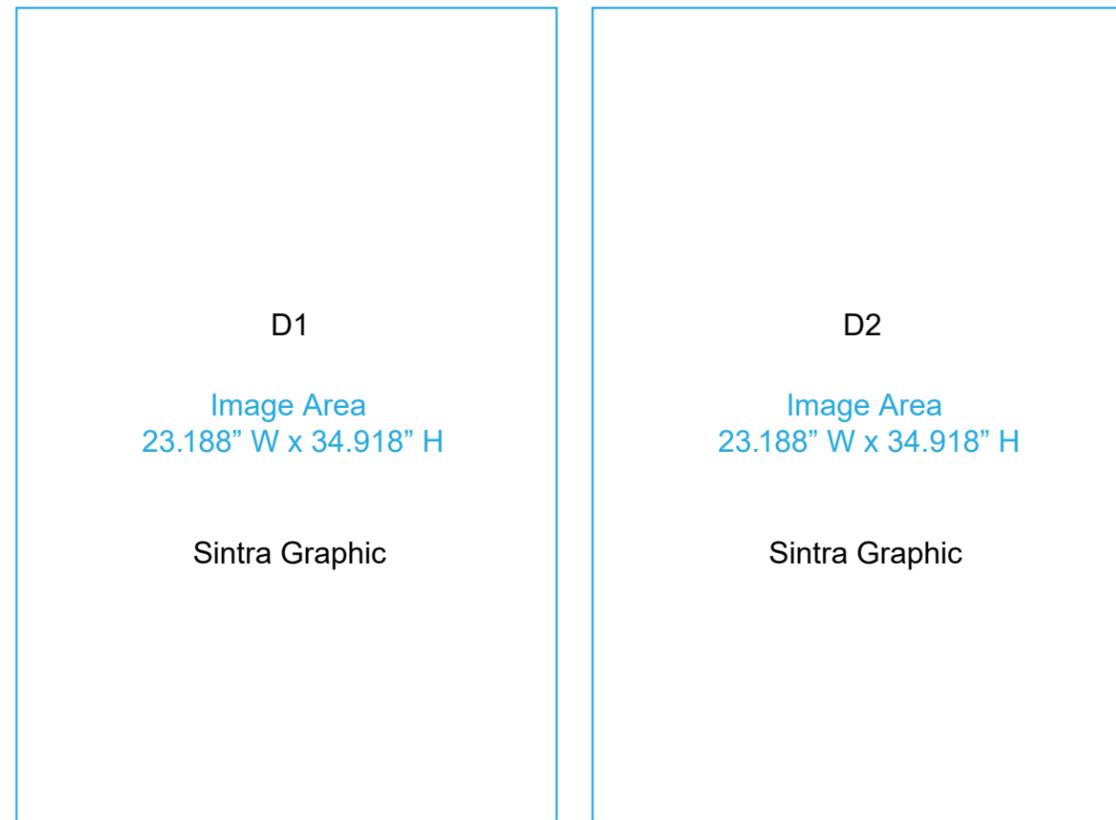

1/4" of graphic perimeter is hidden by extrusion

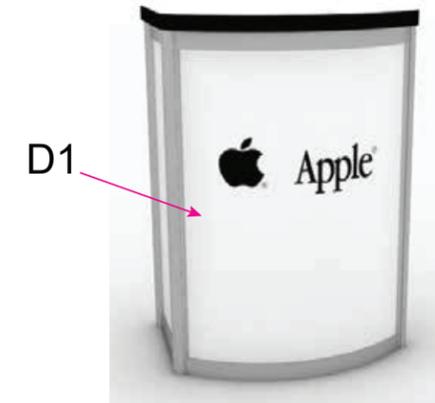

Example






Side-by-Side Assembly

- 1) Frames: Place frames side-by-side with one higher than the other, then slide panel down to lock panels securely together.
- 2) Corner Connectors: Repeat Step 1 for installing corner connectors to frames.

Side-by-Side Disassembly


- 1) Pull pin lock outwards to disengage.
- 2) Pull frames upward and apart at the same time to detach.

Assembly

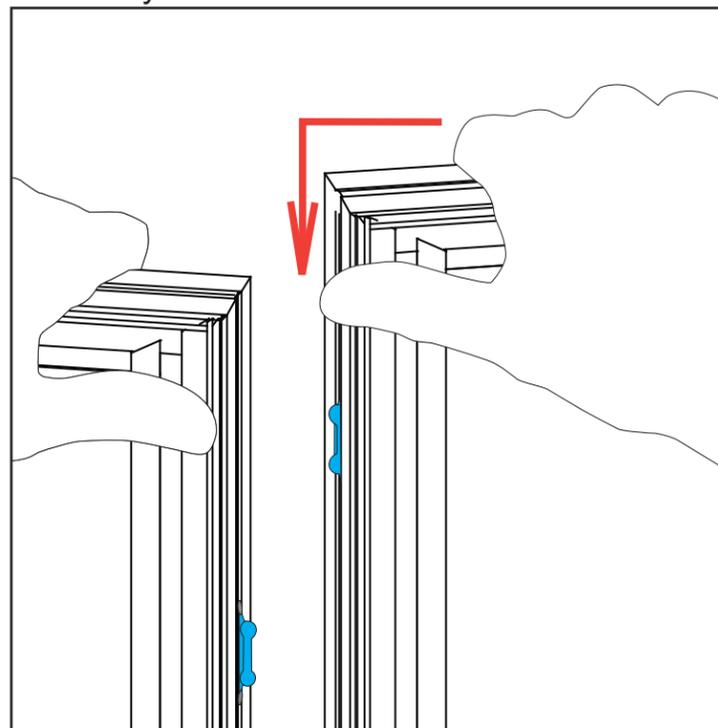


Assembly Cont'd

Push pin lock into hole of connecting frame.
Note: Block of pin lock will secure in groove.

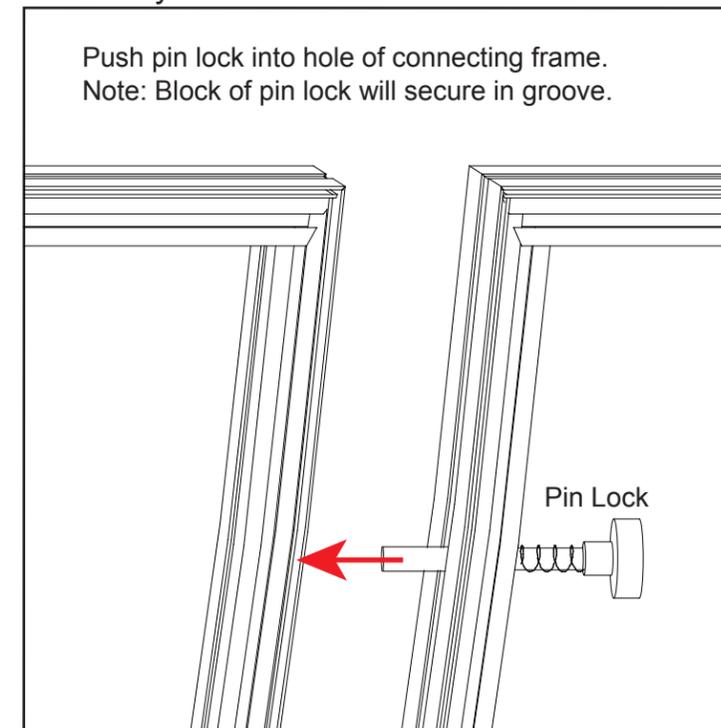

Corner Connector

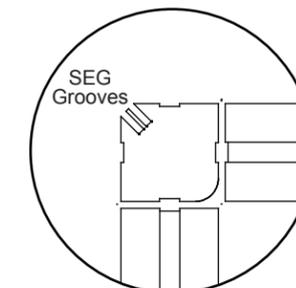

Top View

Note: Orientation of Corner Connector may change.

Stacking Assembly


- 1) Place one horizontal frame on top of the other, lining up the center grooves.
- 2) Turn stacking lock clockwise to tighten into place. Repeat for each lock.

Stacking Disassembly

- 1) Turn the stacking lock counter-clockwise to loosen.
- 2) The whole spring on the stacking lock should be in view to release each frame. The disengaged spring should release the stacking lock. If not, keep turning the stacking lock until it disengages.


Stacking

Push stacking lock into the slot of the upper frame, then spin the cap to tighten the lock.

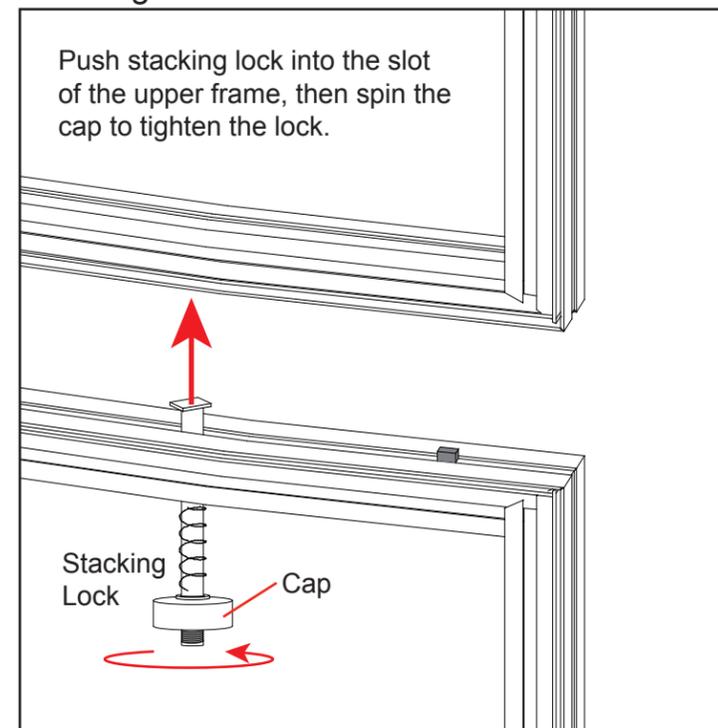

Unstacking

Disengage the stacking lock by spinning the cap counter clockwise and pulling down.

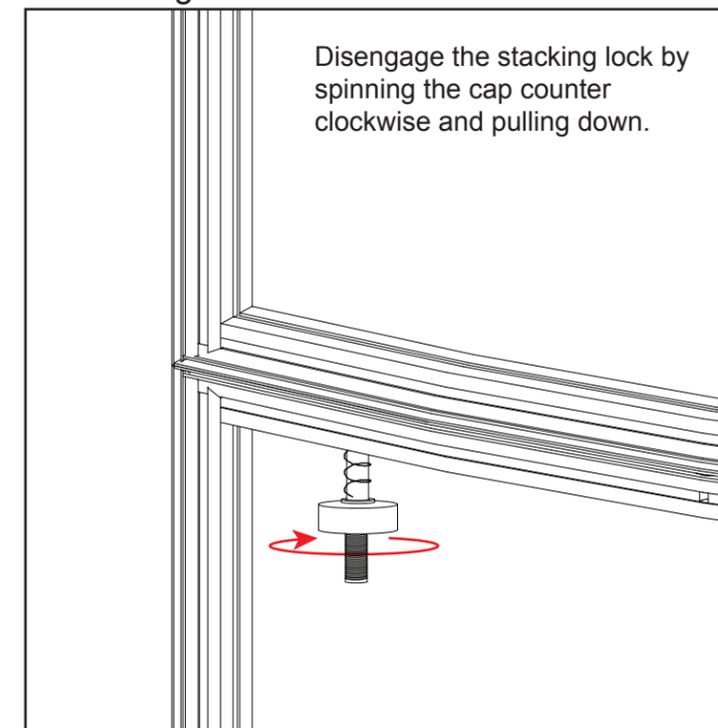

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

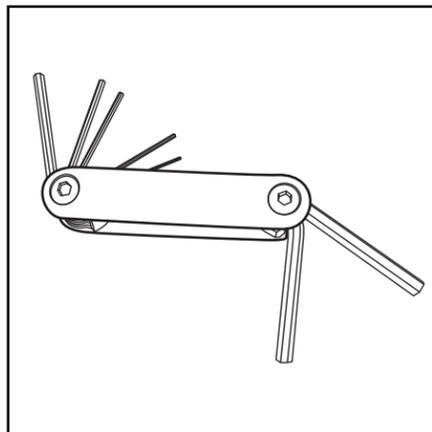


Hex Tool - Essential for Assembly

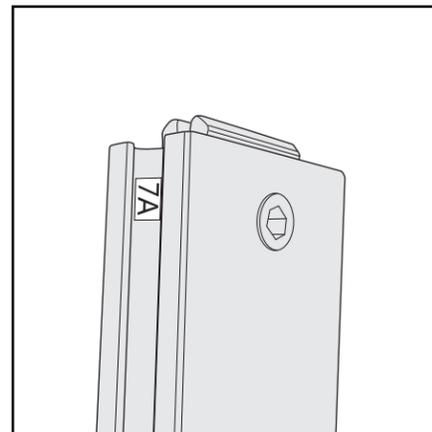


Part Identification - Numbering

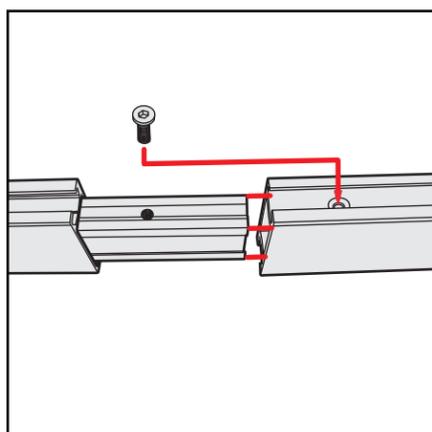


Spline Connection

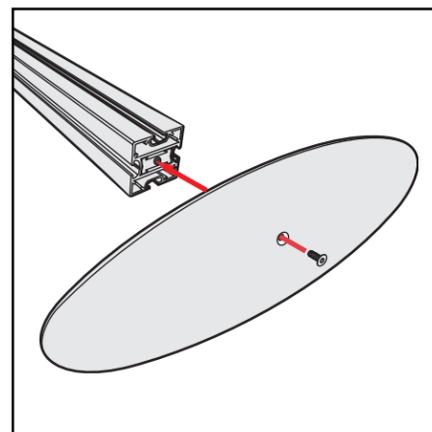

Base Plate & Extrusion Connection

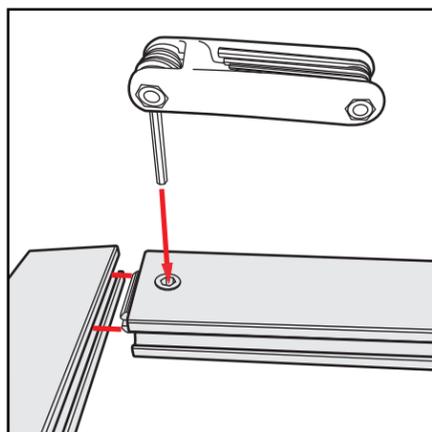

Extrusion & Lock Connection

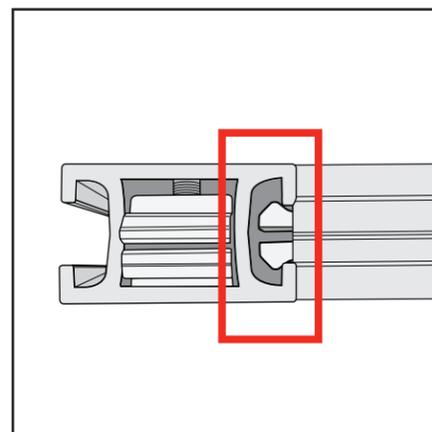

Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS MAY BE REQUIRED



ALL CONNECTIONS MUST BE TIGHTLY SECURED

Controlling the RGB LED lights

Static Mode:

1. Use the Color Ring key to select a color.
2. Saturation is controlled with W/R/G/B keys.
3. White mode is available by long-pressing 'ON' key.
4. Colors (not white) are dimmable with the Brightness key.

Dynamic Mode:

Press "M" key to cycle through the following options:

1. White light fades in and out.
2. Several colors fade in and out.
3. R,G,B three colors fade in and out.
4. R,G,B three colors flash.
5. Six colors flash.
6. Random color flashes.
7. Red color fades in and flashes.
8. Green color fades in and flashes.
9. Blue color fades in and flashes.


To Pair a Remote with Multiple Units:

1. Power on the lights.
2. Press 'ON' key within 3 seconds.
3. Lights will blink when link is made.

To unpair: Long press 'ON' key within 3 seconds after switching on lights.


Remotes can be paired with one or more receivers. Different receivers can work synchronously even when started at different times (within 30 min).

Function of Keys

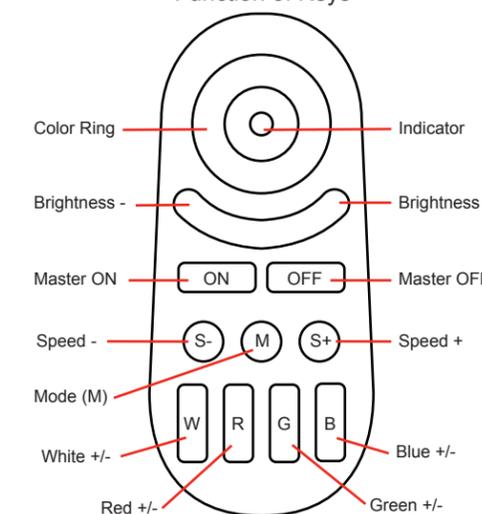


Specifications:

- | | |
|-------------------------------|-----------------------------|
| Receiver: | Remote Control: |
| 1. Working voltage: DC12V/24V | 1. Working voltage: 3V |
| 2. Output: Max. 6A/Channel | 2. Standby power: <20uA |
| Total output Max. 10A | 3. Transmitting power: 6dBm |
| 3. Max standby power: 0.5W | |

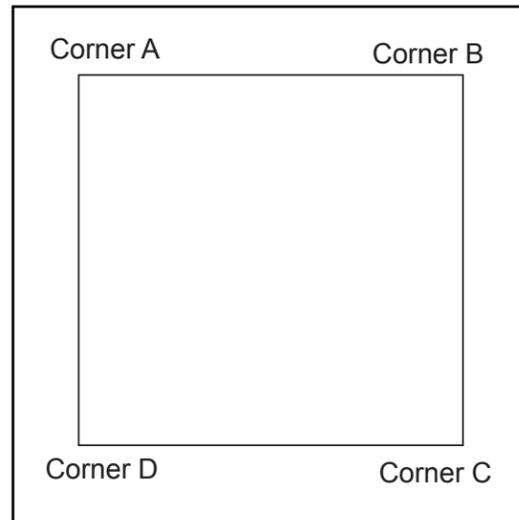

It is important to first insert graphic into each alternate corner then to the sides of the frame. If this is not done, graphic will not fit into the frame correctly.

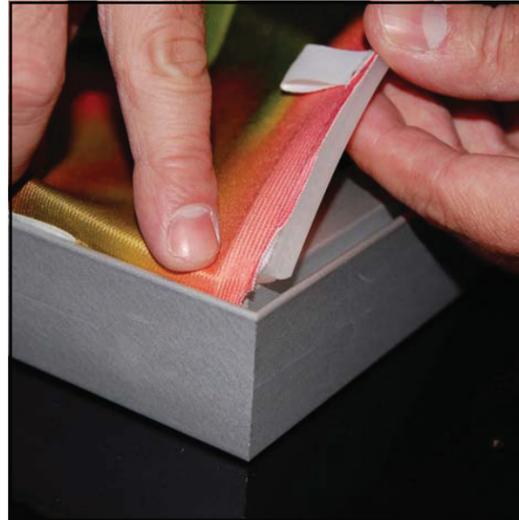

Step 1
Insert corner A. Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side of welt with fabric to outside into the channel. Repeat for other side of this corner.




Step 2
Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of the corners.



Step 3
Once all corners are inserted, press one silicon edge into channel from corners and work toward the center. Make sure welt is fully inserted into channel. Continue until all sides are done. Smooth out edges of graphic.

Graphic Removal

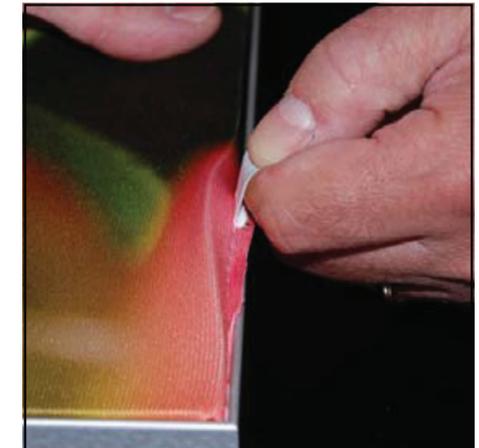

To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.