

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all setscrews and locks during disassembly

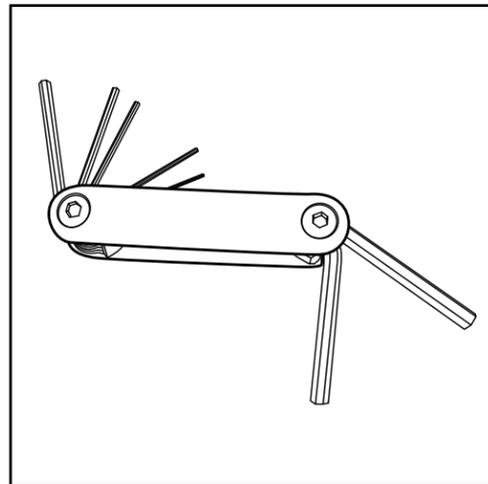


Hex Tool - Essential for Assembly

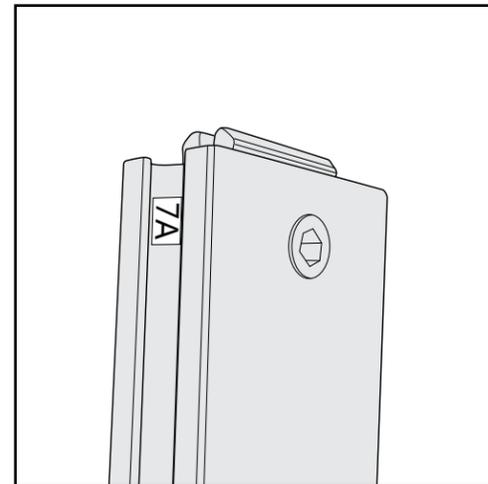


Part Identification - Numbering

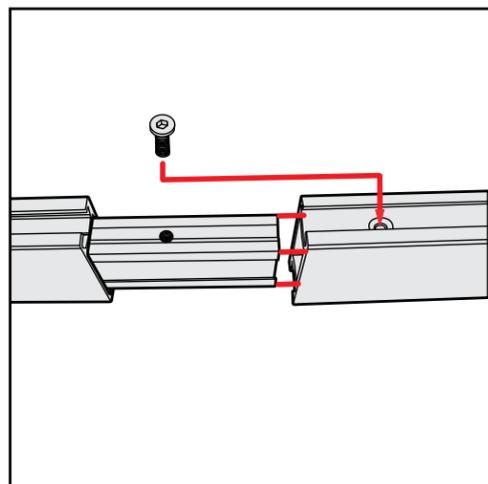


Spline Connection

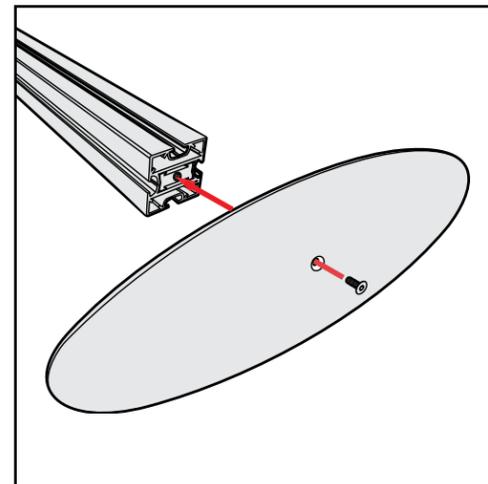

Base Plate & Extrusion Connection

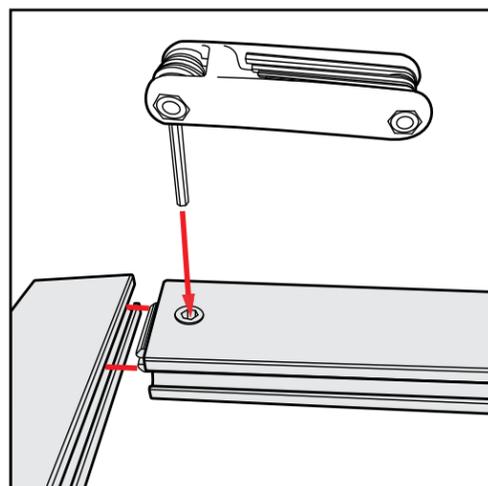

Extrusion & Lock Connection

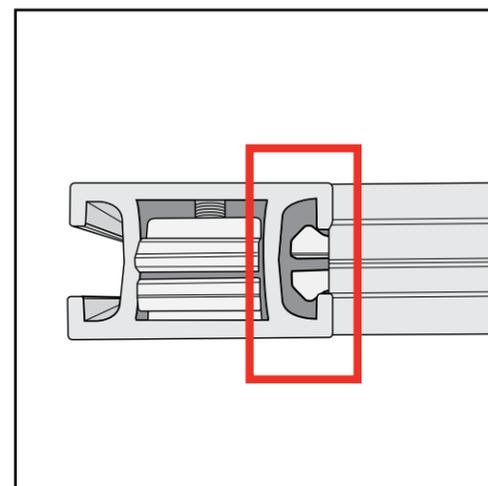

Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED








ALL CONNECTIONS MUST
BE TIGHTLY SECURED

Item	Qty.	Description
1	1	96" h Vertical Extrusion
2	1	96" h Vertical Extrusion
3	1	38.2880" w Horizontal Extrusion
4	1	38.2880" w Horizontal Extrusion
5	1	38.2880" w Horizontal Extrusion
6	1	37.5" h 90° Vertical Extrusion w/ Door Hinges
7	1	37.5" h 90° Vertical Extrusion w/ Door Hinges
8	1	33.9170" h Vertical Extrusion w/ Door Stopper
9	1	41.36" w Horizontal Extrusion
10	2	16" w Horizontal Extrusion
11	1	41.36" w Horizontal Extrusion
12	2	16" w Horizontal Extrusion

Steps:

- 1) Attach lower horizontals [3,9,10] between verticals [1,2,6,7].
- 2) Attach vertical [8] atop lower horizontal [9] as shown.
- 3) Attach doors to verticals [6,7]. Refer to *Door Attachment* detail.
- 4) Place infills between verticals as shown.
- 5) Attach upper horizontals [4,11,12] between verticals [1,2,6,7].
- 6) Place large backwall infill between verticals [1,2].
- 7) Attach upper horizontal [5] between verticals [1,2].
- 8) Place counter atop assembled backwall counter.

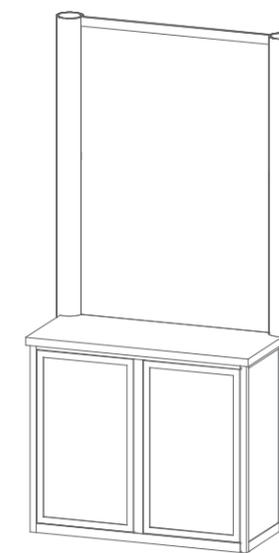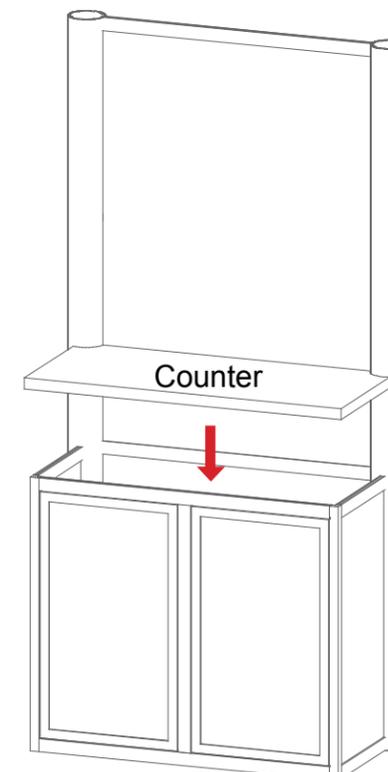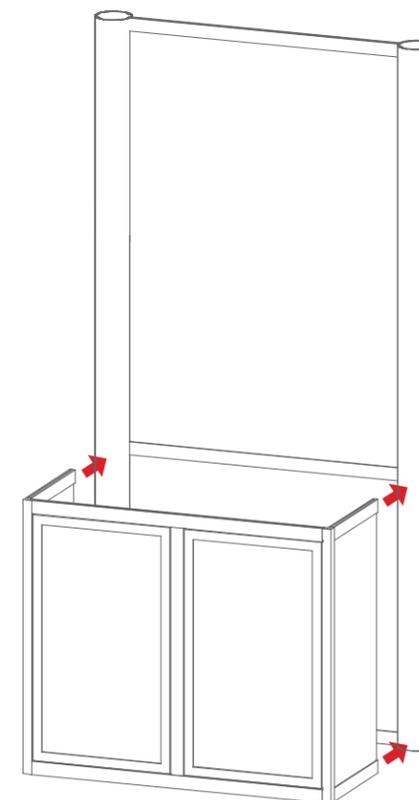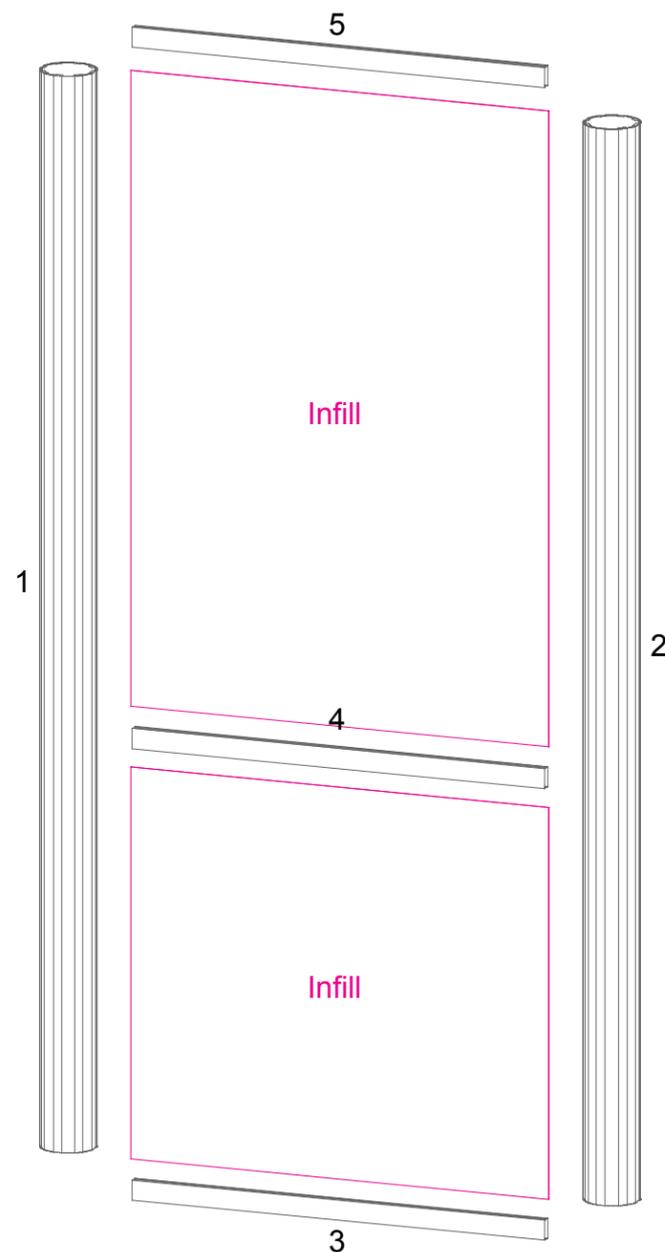
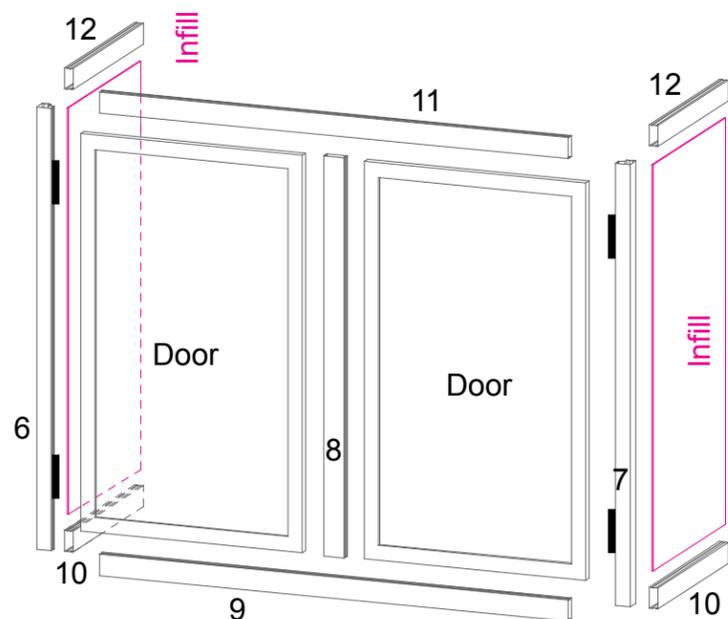


When assembled

Item	Qty.	Description
13	1	45" w x 6" h Horizontal Extrusion for Monitor Mount Support




Steps:

- 1) Attach horizontal extrusion [13] to verticals.
- 2) Attach monitor mount to horizontal extrusion [13].

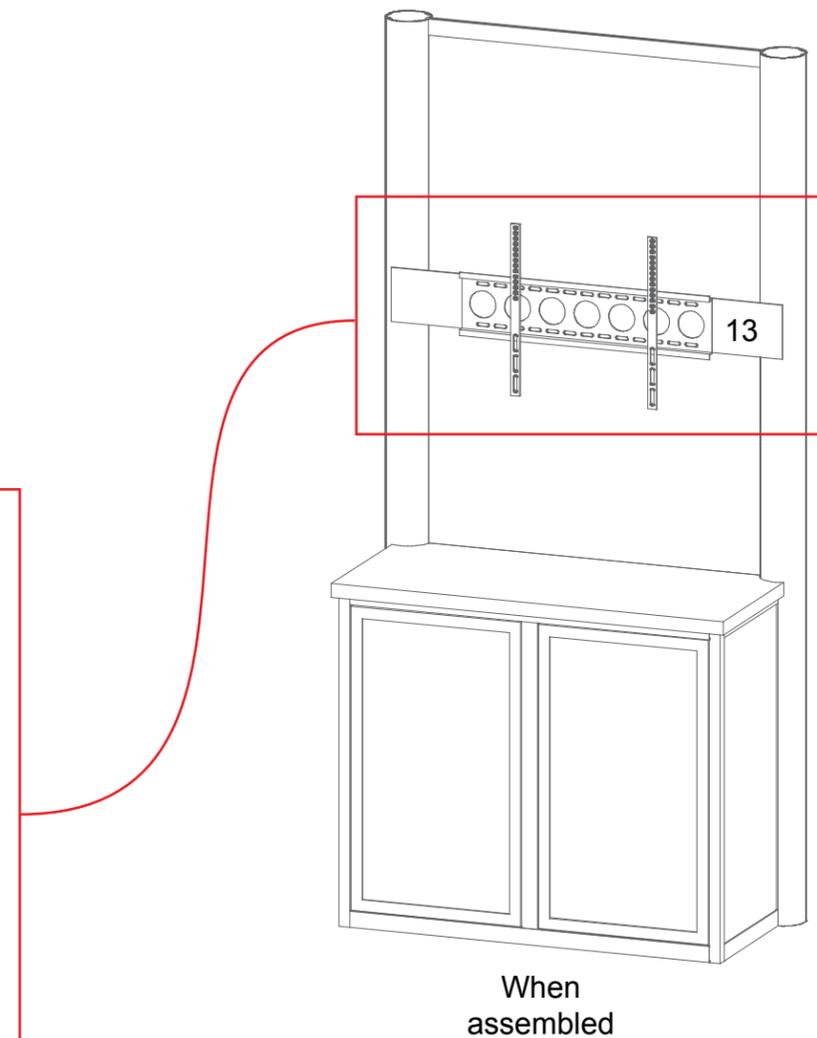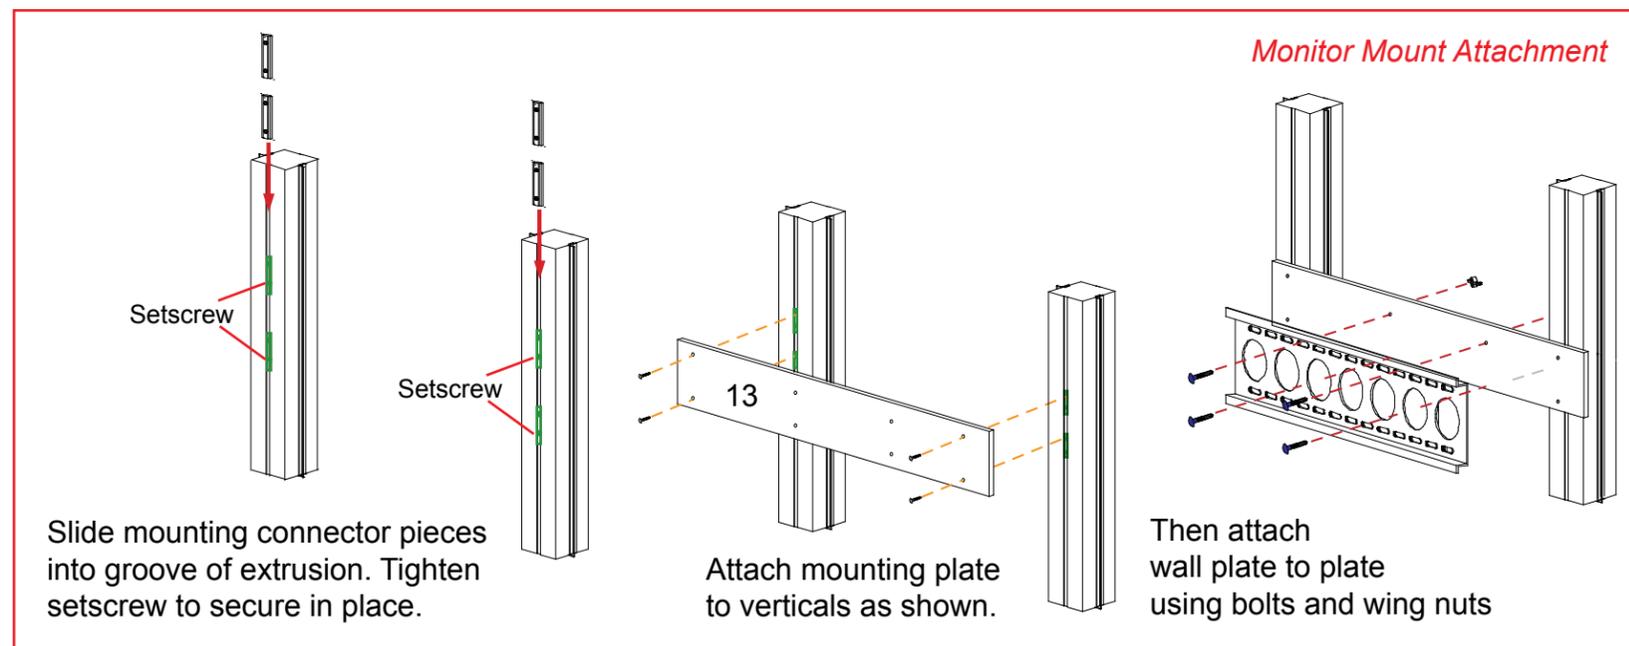

Item	Qty.	Description
15	1	94.75"h Vertical Extrusion
16	1	94.75"h Vertical Extrusion
17	1	39.8250"w Horizontal Extrusion
18	1	39.8250"w Horizontal Extrusion
19	1	39.8250"w Horizontal Extrusion
20	1	39.8250"w Horizontal Extrusion

- Steps:
- 1) Attach horizontal extrusions between verticals.
 - 2) Attach SGG fabric graphic to extrusions [15-20].
 - 3) Attach wings to verticals as shown. Refer to detail.

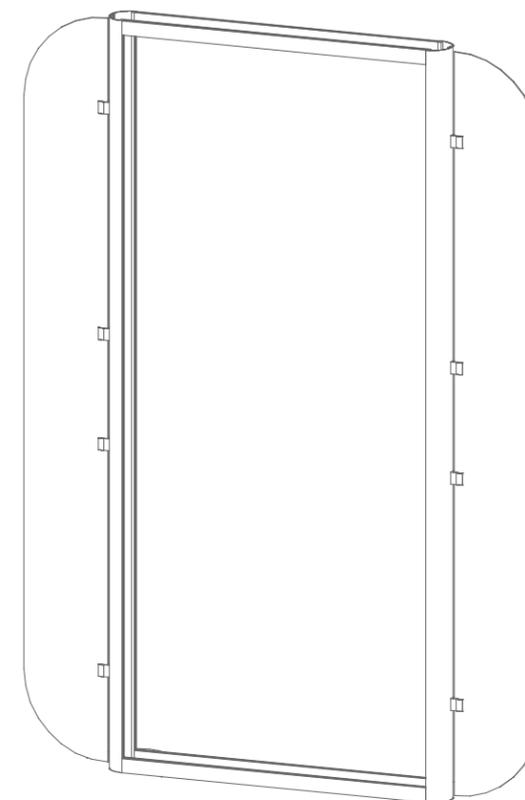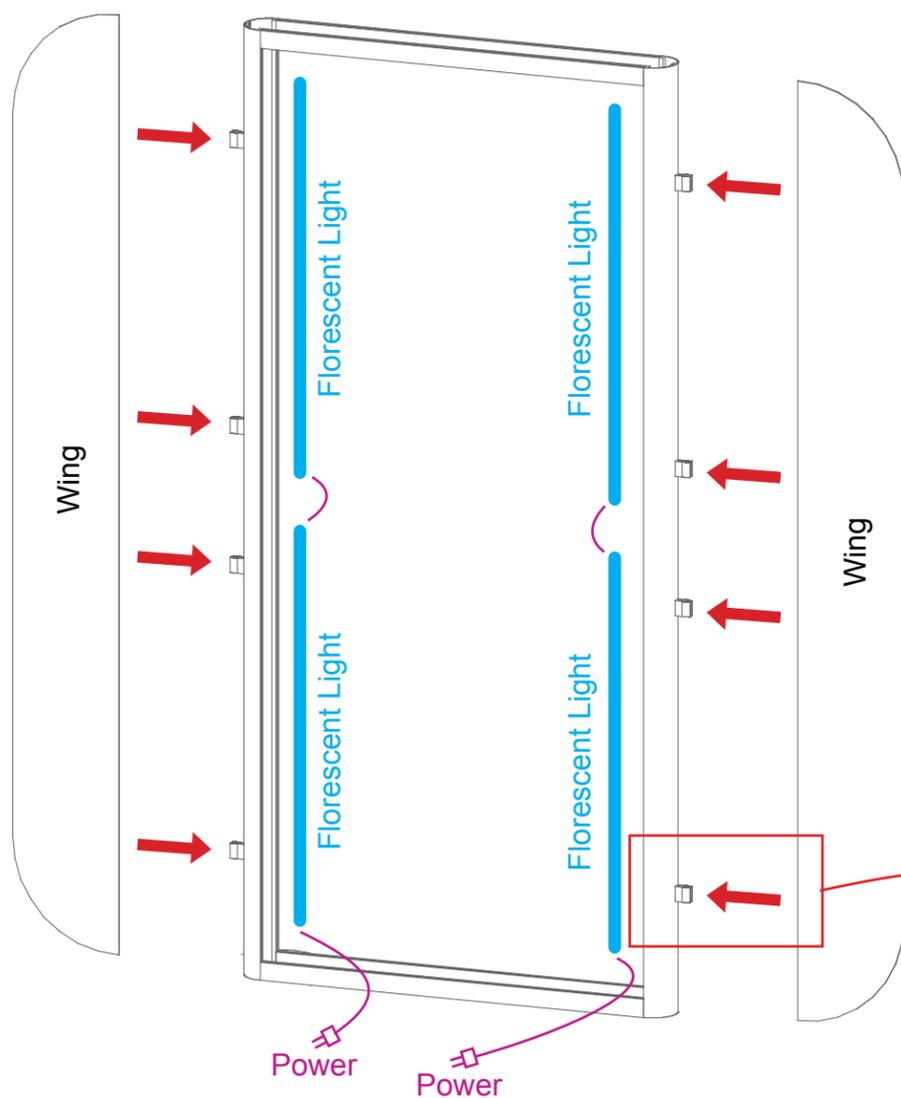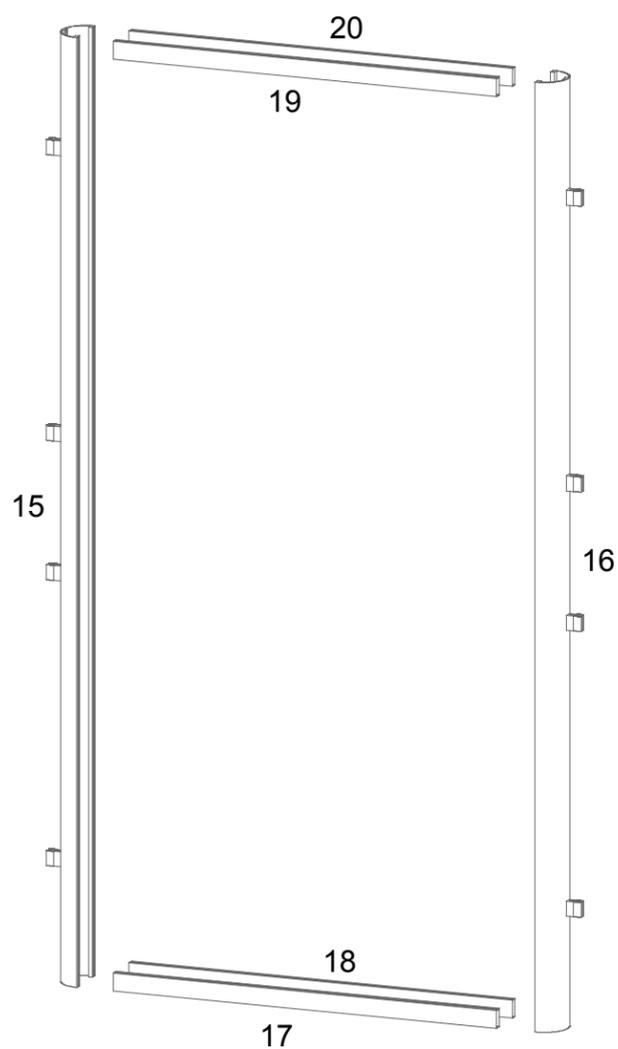

When assembled

A10 Clamp Detail





Tighten set screw to secure A10 to extrusion.

Tighten knob to secure header/wing in place.

Item	Qty.	Description
14	1	Base Plate
21	1	95.750”h Formed Vertical Extrusion
22	1	95.750”h Formed Vertical Extrusion
23	1	39.825”w Horizontal Extrusion
24	1	39.825”w Horizontal Extrusion

Steps:

- 1) Assemble formed verticals, horizontals, base plates, and assembled light box together using bolts as shown. Refer to detail below.

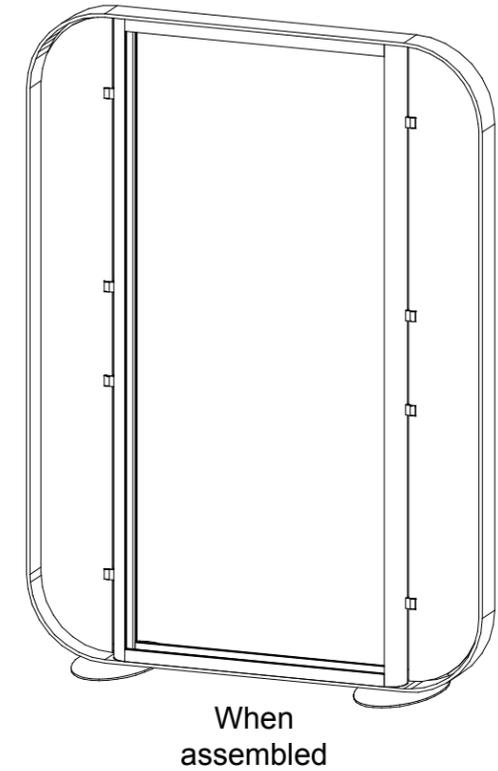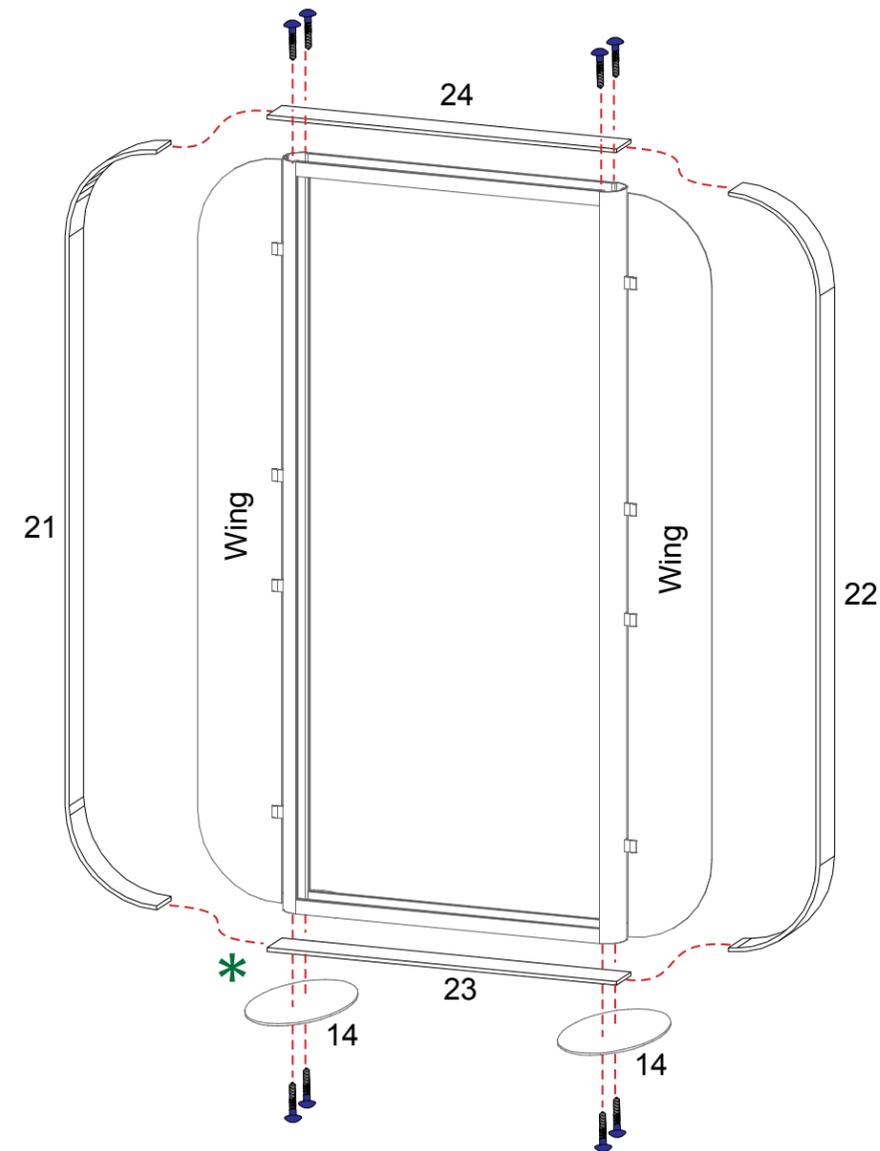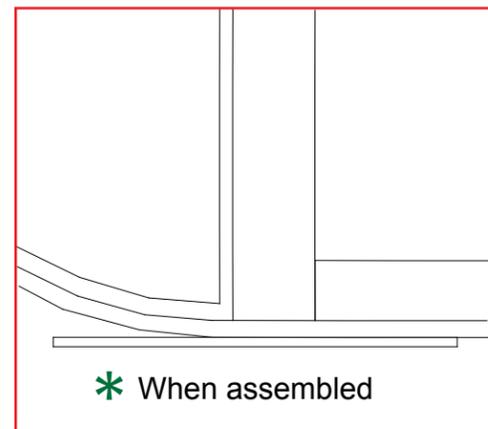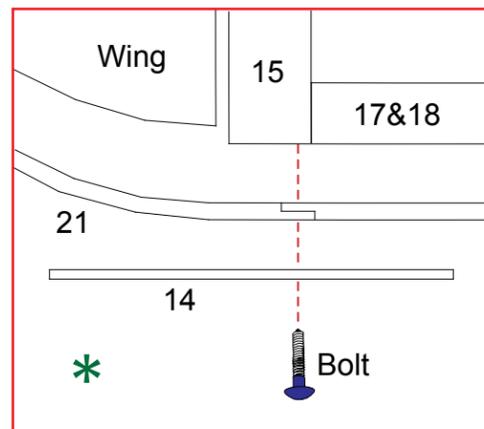

Item	Qty.	Description
1	1	Base Plate
2	1	48"h Formed Vertical Extrusion
3	1	48"h Formed Vertical Extrusion
4	1	6"w Round Top
5	1	21.594"w Horizontal Extrusion
6	4	16"w Counter Support

Steps:

- 1) Assemble formed verticals, horizontal, round top, and base plate together using bolts and locks as shown.
- 2) Attach counter supports [6] to horizontal [5].
- 3) Slide counter into assembled kiosk and place atop counter supports.

